

# P6191-V3

NEW

19" SXGA TFT Industrial LCD Monitor




## Features


- 19" SXGA TFT LED backlight LCD
- NEMA 4/12 (IP65)- compliant panel mounting flat panel monitor
- Supports panel mount, wall mount, rack mount, and VESA arm
- Resistive touchscreen
- 24 VDC power input
- VGA, HDMI, and DisplayPort with multi-signal inputs



▲ Ultra-slim mechanism design

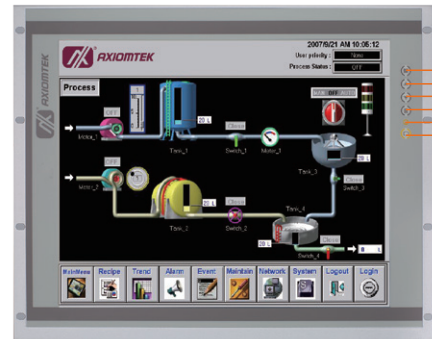

1. Menu
2. SEL+
3. SEL-
4. Exit
5. Power LED
6. Power switch

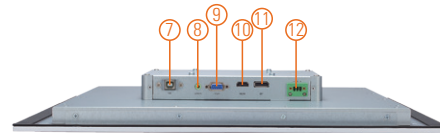

7. USB touch interface
8. Audio (Line-in)
9. VGA
10. HDMI
11. DisplayPort
12. 24 VDC power input

## Introduction

The P6191-V3 is an ultra slim industrial LCD monitor, which adopts 19-inch 350 nits SXGA LED backlight LCD display and supports multi-signal interfaces including DisplayPort, VGA, and HDMI. Featuring NEMA 4/12 and IP65 compliant front bezel, 24 VDC power input. Moreover, the P6191-V3 supports panel mount, wall mount, rack mount or VESA FPMPI (Video Electronics Standards Association Flat Panel Monitor Physical Mounting Interface) mounting. With the compact mechanism design, users can enjoy free from space constraint. It is especially suitable for POI/POS, excellent HMI, and all kinds of heavy-duty industrial fields.

## Specifications

Front Bezel	NEMA 4/12 (IP65)-compliant and metal front bezel	
Mounting	Panel mount, wall mount, rack mount or VESA arm FPMPI mounting (video electronics standards association flat panel monitor physical mounting interface)	
LCD Panel	Display	19" SXGA TFT LED
	Max. Resolution	1280 x 1024
	Max. Colors	16.7M
	Active Area (mm)	376.32 x 301.06
	Pixel Pitch (mm)	0.294 x 0.294
	Response Time	5ms
	Backlight	LED backlight
	Backlight MTBF	30,000 hrs
	Viewing Angle (H/V)	170°/160°
	Contrast Ratio	1000 (TYP.)
Brightness (cd/m <sup>2</sup> )	250 nits	
Display Control	OSD (on screen display)	
Input Signal	DisplayPort VGA HDMI Touchscreen: USB interface	

## Specifications

I/O Connectors	1 x USB for touchscreen version 1 x Audio (Line-in) 1 x VGA 1 x DP 1 x HDMI 1 x Power input with terminal block (DC version)
Power Adapter	DC version: 24VDC
Power Consumption	17 W
Touchscreen	5-wire resistive touch
Dimensions	482 mm (18.98") (W) x 55 mm (2.17") (D) x 380 mm (14.96") (H)
Packing Dimensions	625 mm (24.6") (W) x 260 mm (10.23") (D) x 600 mm (23.6") (H)
Weight (net/gross)	6 kg (13.23 lb)/7.5 kg (16.53 lb)
Environment	Operating temperature: 0°C to +45°C (+32°F to +113°F) Relative humidity: 10% - 90% @ +40°C, non-condensing
Packing List	1 x P6191-V3 unit 1 x VGA cable 1 x USB cable for touchscreen (for touch version) 1 x Audio cable
Certificate	CE

## Ordering Information

P6191PR-DC-U-V3 19" industrial resistive touch screen, DC version, and USB interface  
(P/N: E226191115)

\* Other configuration by request

\* Specification and certifications may vary based on different requirements

## Optional Accessories

50906D24000E	Adaptor 24V/120W, wire only
59902000030E	US 1.8M power cord
59904000050E	EK 1.83M power cord
59903000080E	EU 1.83M power cord
5946L203800E	HDMI cable
59461713910E	DisplayPort cable
881261910A0E	Panel mount kit
881231770A0E	Wall mount kit
E221177116	Desktop stand



**IP SYSTEMES**

8 rue du Colonel Chambonnet – BP67

69672 BRON Cedex

Tel. : 04 72 14 18 00

Fax : 04 72 14 18 01

[www.ip-systemes.com](http://www.ip-systemes.com) – [info@ip-systemes.fr](mailto:info@ip-systemes.fr)

## Dimensions

