

# APPD 1501T



15" IP65 Industrial 4:3 XGA LCD Flush Touch Monitor



## Main Features

- ♦ IP65 compliant plastic front bezel with flush panel by 5-wire touch screen
- ♦ Triple display input interface: analog VGA/DVI-D/DisplayPort
- ♦ Shares identical appearance with APPC series
- ♦ Dual touch screen interface: RS232 and USB
- ♦ Ultra slim in depth
- ♦ OSD multilanguage function

## Product Overview

15" 4:3 LCD display APPD 1501T is based on a 5-wire resistive touch screen. It has 400 nits brightness and can support resolutions up to 1024 x 768. APPD 1501T is ideal for space-critical environments where systems and displays are kept apart. In addition, APPD 1501T adopts a flush panel design and has IP65 front panel. APPD 1501T provides prevailing video interfaces: VGA, DVI and DisplayPort, supporting both digital and analog signals; touch screen can be connected with RS-232 or USB ports. Moreover, APPD 1501T supports 12~24VDC power input and offers panel mount and VESA mount, allowing users to choose the mounting method that meets their situation. APPD 1501T is the best solution for NEXCOM NISE fanless computer, NVIS security surveillance series and APPC panel PC when a second display is required.

## Specifications

### Panel

- ♦ LCD size: 15", 4:3
- ♦ Resolution: XGA 1024 x 768
- ♦ Luminance: 400cd/m<sup>2</sup>
- ♦ Contrast ratio: 2500
- ♦ LCD color: 16.7M
- ♦ Viewing angle: 88 (U), 88 (D), 88 (L), 88 (R)
- ♦ Backlight: LED

### Touch Screen

- ♦ 5-Wire resistive (flush panel type)
- ♦ Light transmission: 81%
- ♦ Interface: USB and RS232

### Rear I/O

- ♦ Touch screen interface port: RS-232 (1 x DB9)/USB type A
- ♦ Video port: VGA (1 x DB15)/DVI-D (1 x DVI-H connector)/DisplayPort
- ♦ DC power input connector: 3-pin Phoenix terminal blocks

### OSD Function

- ♦ OSD keypad
- ♦ Multilanguage OSD


### Mechanical & Environment

- ♦ Color: Pantone black and black silver chassis box
- ♦ IP protection: IP65 front
- ♦ Mounting: panel/wall/stand/VESA 100mm x 100mm
- ♦ Power
  - Power input: 12V~24VDC
  - Power adapter: optional AC to DC power adapter (+12V, 60W)
- ♦ Vibration
  - IEC 68 2-64
  - 2Grms @ sine, 5~500Hz, 1hr/axis (operating)
  - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- ♦ Shock
  - IEC 68 2-27
  - 20G@wall mount, half sine, 11ms
  - Operating temperature: -5°C~50°C
  - Storage temperature: -20°C~75°C
- ♦ Operating humidity: 10%~90% relative humidity, non-condensing
- ♦ Dimension: 384.37 x 309.95 x 51mm
- ♦ Weight: 3.9 kg

### Certifications

- ♦ CE approval
- ♦ FCC Class B

## Dimension Drawing

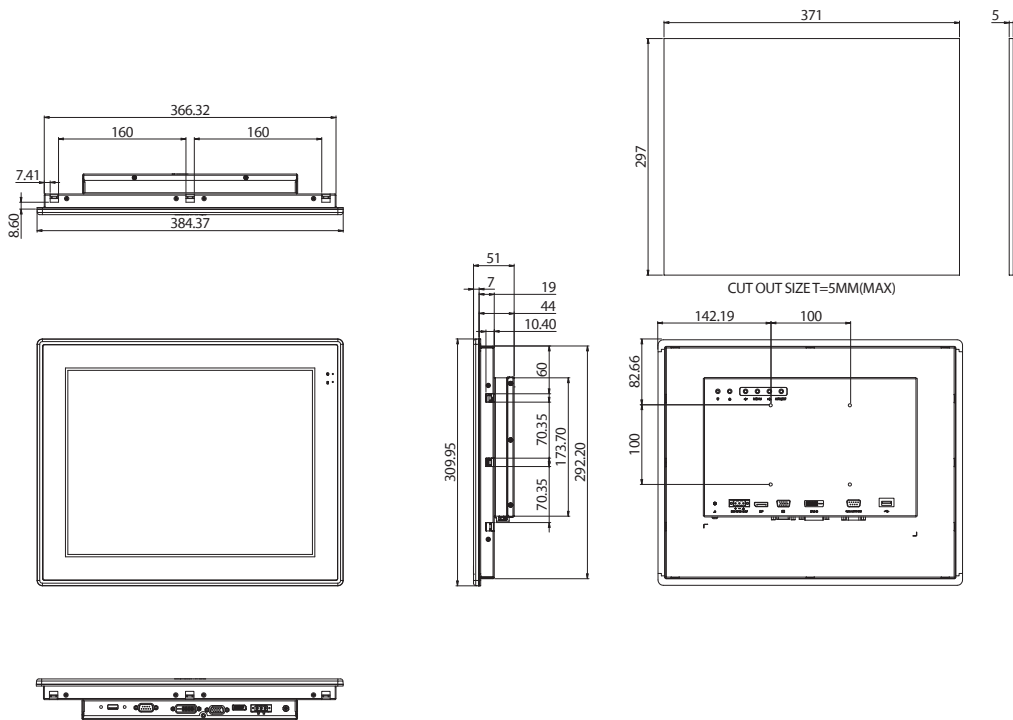

## Ordering Information

- ♦ **APPD 1501T (P/N: 10IA1501T00X0)**  
15" XGA industrial 4:3 LED backlight flush touch monitor with VGA, DVI-D and DisplayPort, 12~24VDC input, RS232 and USB touch screen interfaces

### Options

- ♦ **12V, 60W AC/DC power adapter w/o power cord**  
(P/N: 7400060048X00)
- ♦ **1.8m DVI-D male to DVI-D male cable**  
(P/N: 603DVI0007X00)



### IP SYSTEMES

8 rue du Colonel Chambonnet – BP67

69672 BRON Cedex

Tel. : 04 72 14 18 00

Fax : 04 72 14 18 01

[www.ip-systemes.com](http://www.ip-systemes.com) – [info@ip-systemes.fr](mailto:info@ip-systemes.fr)