



Main Features

- IP66 compliant and metal housing with robust aluminum front zero bezel for harsh environment
- 10 points P-Cap multi-touch with zero bezel flush front design
- 3 display input interface: analog VGA/DVI-D/DisplayPort
- Shares identical appearance with IPPC series
- Ultra slim in depth
- OSD multi-language function
- All connectors with lock
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- Wide range power input 12~24VDC

Product Overview

21.5" 16:9 LCD display IPPD 2100P is based on a ten points P-Cap multi-touch screen with resolution up to 1920 x 1080 (Full HD) Panel. IPPD 2100P has system grade grounding protection which means chassis grounding and power grounding design to avoid in-rush current damage monitor. IPPD 2100P is ideal for space-critical environments where systems and displays are kept apart. In addition, IPPD 2100P adopts zero bezel flush panel design and has IP66 front panel. IPPD 2100P provides prevailing video interface: VGA, DVI-D and DisplayPort, supporting both digital and analog signals. Moreover, IPPD 2100P supports 12~24VDC power input and offers panel mount and VESA mount, allowing users to choose the mounting method that meets their situation. IPPD 2100P is the best solution for NEXCOM NISE fanless computer, NVIS security surveillance series and APPC/IPPC panel PC when a second display is required.

Specifications

Panel

- LCD size: 21.5", 16:9
- Resolution: full HD 1920 x 1080
- Luminance: 300cd/m2
- Contrast ratio: 5000
- LCD color: 16.7M
- Viewing angle: 89 (U), 89 (D), 89 (L), 89 (R)
- Backlight: LED

Touch

- Ten points P-Cap (projected capacitive touch)
- Touch light transmission: 87%
- Anti-scratch surface: 7H hardness
- Touch interface: USB
- Windows 8 compliance

Rear I/O

- Touch interface port: USB with Lock
- Video port: VGA (1 x DB15)/DVI-D (1 x DVI-D connector)/DisplayPort
- DC power input connector: 3-pin PHOENIX terminal blocks

OSD Function

- OSD keypad
- Multilanguage OSD


Mechanical & Environment

- Color: black silver front bezel
- IP protection: IP66 front
- Mounting: panel/ wall/ stand/ VESA 100mm x 100mm
- System with panel mounting kit w/o panel mounting hole
- Power:
 - Power input: 12~24VDC
 - Power adapter: optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64
 - 2Grms @ sine, 5~500Hz, 1hr/axis (operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Temperature:
 - Operating temperature: -10°C to 60°C
 - Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 562.4 x 382.4 x 50.85mm
- Weight: 7.87Kg

Certifications

- CE (including EN61000-6-1/EN61000-6-2/EN61000-6-3/EN61000-6-4)
- FCC Class B

Dimension Drawing

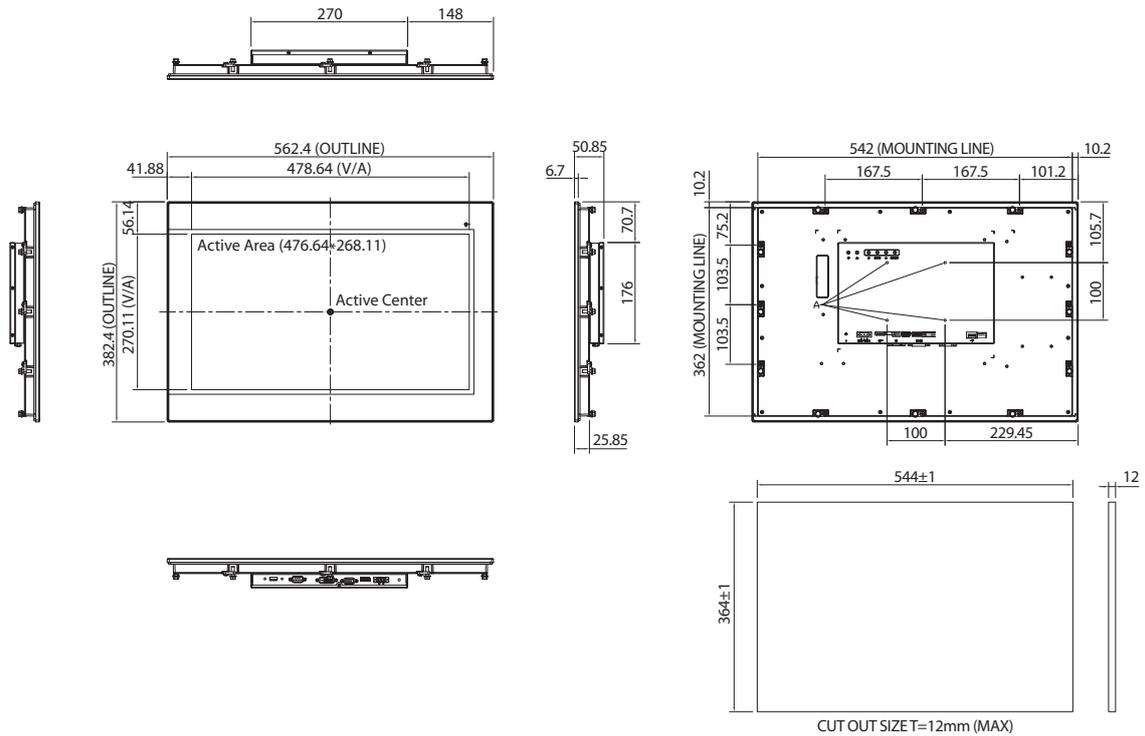

Ordering Information

Barebone

- **IPPD 2100P-C (P/N: 10IZ2100P02X0)**
21.5" full HD heavy industrial 16:9 LED backlight P-Cap touch monitor with VGA, DVI-D and DisplayPort input, 12~24VDC input

Option

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060031X00)**
- **1.8m DVI-D male to DVI-D male cable (P/N: 60233DVI28X00 or P/N: 603DVI0007X00)**
- **1.8m DisplayPort cable (P/N: 6030000122X00)**



IP SYSTEMES

8 rue du Colonel Chambonnet – BP67

69672 BRON Cedex

Tel. : 04 72 14 18 00

Fax : 04 72 14 18 01

www.ip-systemes.com – info@ip-systemes.fr