

Analog Input Module (RTD, TC)

GT-3xxx User Manual



IP SYSTEMES
8 rue du Colonel Chambonnet – BP67
69672 BRON Cedex
Tel. : 04 72 14 18 00
Fax : 04 72 14 18 01
www.ip-systemes.com – info@ip-systemes.fr

CREVIS

DOCUMENT CHANGE SUMMARY				
REV	PAGE	REMARKS	DATE	EDITOR
1.00	New Document		18/07/30	Jy Hyun
1.01		Certifications is updated. (UL add)	20/08/11	Jy Hyun

Table of Contents

1. Important Notes	5
1.1. Safety Instruction	6
1.1.1. Symbols	6
1.1.2. Safety Notes	6
1.1.3. Certification	6
2. Analog Input Module List	7
3. Specification.....	8
3.1. GT-3704	8
3.1.1. Wiring Diagram	8
3.1.2. LED Indicator.....	9
3.1.3. Channel Status LED	9
3.1.4. Environment Specification	10
3.1.5. Specification.....	11
3.1.6. Mapping Data into the Image Table	12
3.1.7. Configuration Parameter – 10 Bytes.....	13
3.1.8. Data Value	14
3.2. GT-3708	15
3.2.1. Wiring Diagram	15
3.2.2. LED Indicator.....	16
3.2.3. Channel Status LED	16
3.2.4. Environment Specification	17
3.2.5. Specification.....	18
3.2.6. Mapping Data into the Image Table	19
3.2.7. Configuration Parameter – 18 Bytes.....	20
3.2.8. Data Value	21
3.3. GT-3804	22
3.3.1. Wiring Diagram	22
3.3.2. LED Indicator.....	23
3.3.3. Channel Status LED	23
3.3.4. Environment Specification	24
3.3.5. Specification.....	25

<u>3.3.6. Mapping Data into the Image Table</u>	27
<u>3.3.7. Configuration Parameter – 8 Bytes</u>	28
<u>3.3.8. Data Value</u>	29
<u>3.4. GT-3808</u>	30
<u>3.4.1. Wiring Diagram</u>	30
<u>3.4.2. LED Indicator</u>	31
<u>3.4.3. Channel Status LED</u>	31
<u>3.4.4. Environment Specification</u>	32
<u>3.4.5. Specification</u>	33
<u>3.4.6. Mapping Data into the Image Table</u>	35
<u>3.4.7. Configuration Parameter – 8 Bytes</u>	36
<u>3.4.8. Data Value</u>	37
<u>4. Dimension</u>	38
<u>4.1. GT-3xx4(RTB), GT-3xx8(RTB)</u>	38
<u>4.2. GT-3xxF(Connector)</u>	39
<u>5. Mounting</u>	40
<u>5.1. I/O Inserting and Removing Devices</u>	40
<u>5.2. RTB (Removable Terminal Block)</u>	41
<u>6. G-Bus Pin Description</u>	42

1. Important Notes

Solid state equipment has operational characteristics differing from those of electromechanical equipment.

Safety Guidelines for the Application, Installation and Maintenance of Solid State Controls describes some important differences between solid state equipment and hard-wired electromechanical devices.

Because of this difference, and also because of the wide variety of uses for solid state equipment, all persons responsible for applying this equipment must satisfy themselves that each intended application of this equipment is acceptable.

In no event will CREVIS be responsible or liable for indirect or consequential damages resulting from the use or application of this equipment.

The examples and diagrams in this manual are included solely for illustrative purposes. Because of the many variables and requirements associated with any particular installation, CREVIS cannot assume responsibility or liability for actual use based on the examples and diagrams.

Warning!

- ✓ **If you don't follow the directions, it could cause a personal injury, damage to the equipment or explosion**
- Do not assemble the products and wire with power applied to the system. Else it may cause an electric arc, which can result into unexpected and potentially dangerous action by field devices. Arching is explosion risk in hazardous locations. Be sure that the area is non-hazardous or remove system power appropriately before assembling or wiring the modules.
- Do not touch any terminal blocks or IO modules when system is running. Else it may cause the unit to an electric shock or malfunction.
- Keep away from the strange metallic materials not related to the unit and wiring works should be controlled by the electric expert engineer. Else it may cause the unit to a fire, electric shock or malfunction

Caution!

- ✓ **If you disobey the instructions, there may be possibility of personal injury, damage to equipment or explosion. Please follow below Instructions.**
 - " Check the rated voltage and terminal array before wiring. Avoid the circumstances over 50 °C of temperature. Avoid placing it directly in the sunlight.
 - " Avoid the place under circumstances over 85% of humidity.
 - " Do not place Modules near by the inflammable material. Else it may cause a fire.
 - " Do not permit any vibration approaching it directly.
 - " Go through module specification carefully, ensure inputs, output connections are made with the specifications. Use standard cables for wiring.

" Use Product under pollution degree 2 environment.

1.1. Safety Instruction

1.1.1. Symbols

DANGER 	Identifies information about practices or circumstances that can cause an explosion in a hazardous environment, which may lead to personal injury or death property damage, or economic loss
IMPORTANT	Identifies information that is critical for successful application and understanding of the product
ATTENTION 	Identifies information about practices or circumstances that can lead to personal injury, property damage, or economic loss. Attentions help you to identify a hazard, avoid a hazard, and recognize the consequences

1.1.2. Safety Notes

DANGER 	The modules are equipped with electronic components that may be destroyed by electrostatic discharge. When handling the modules, ensure that the environment (persons, workplace and packing) is well grounded. Avoid touching conductive components, G-BUS Pin.
--	--

1.1.3. Certification

c-UL-us UL Listed Industrial Control Equipment, certified for U.S. and Canada

See UL File E235505

CE Certificate

EN 61000-6-2; Industrial Immunity

EN 61000-6-4; Industrial Emissions


Reach, RoHS (EU, CHINA)

2. Analog Input Module List

3. Specification


3.1. GT-3704

3.1.1 Wiring Diagram

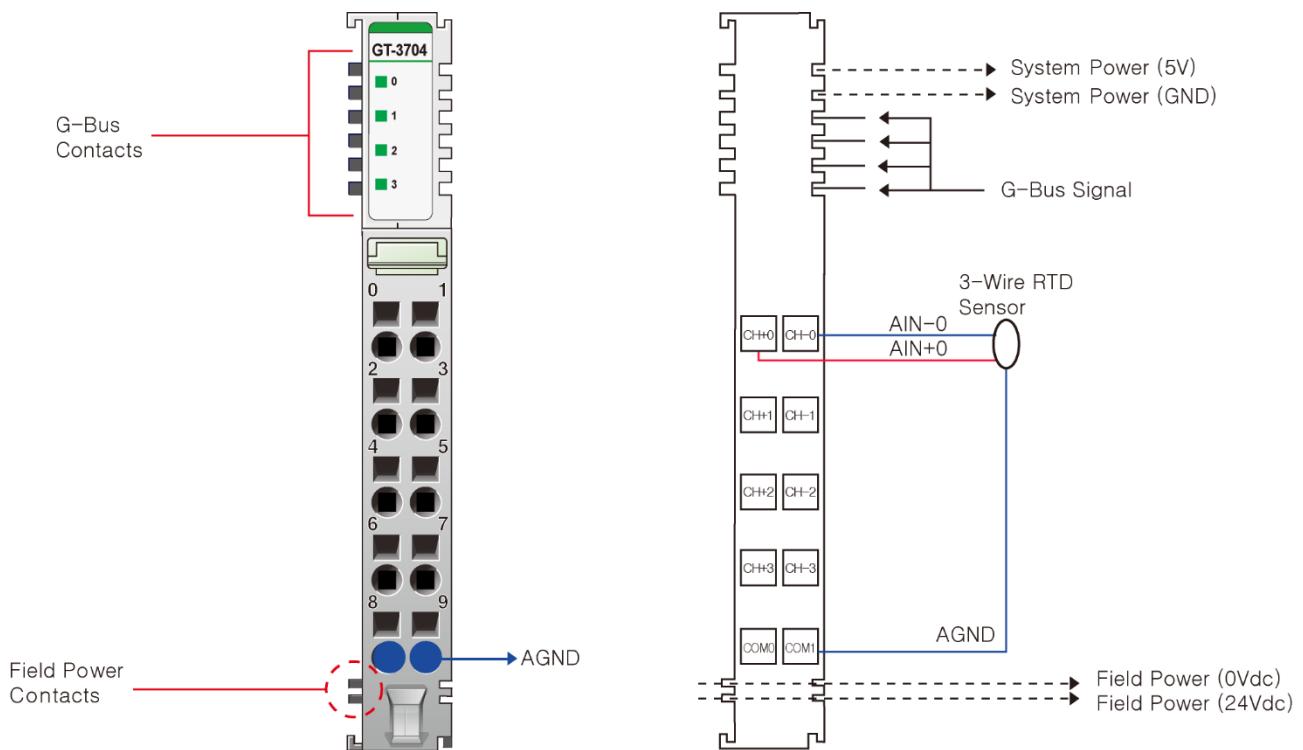

Pin No.	Signal Description	Signal Description	Pin No.
0	RTD Channel 0+	RTD Channel 0-	1
2	RTD Channel 1+	RTD Channel 1-	3
4	RTD Channel 2+	RTD Channel 2-	5
6	RTD Channel 3+	RTD Channel 3-	7
8	AGND	AGND	9

3.1.2. LED Indicator

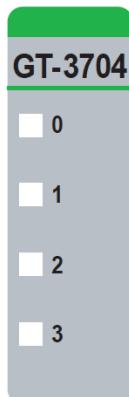

LED No.	LED Function / Description	LED Color
0	Input Channel 0	Green
1	Input Channel 1	Green
2	Input Channel 2	Green
3	Input Channel 3	Green

3.1.3. Channel Status LED

Status	LED	To indicate
No Signal	Off	Input Sensor Open or Input Range Over
Normal Operation	Off	Normal Operation
On Signal	Green	Sensor Connected and Input Range Valid
Normal Operation	Green	Normal Operation

3.1.4. Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 70°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% Non-condensing
Operationg Altitude	2,000m
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27 : 2008/ 15g, 11bs
Vibration Resistance	Based on IEC 60068-2-6 DNVGL-CG-0039 : 2016/ Vibration Class B, 4g
Industrial Emissions	EN61000-6-4/AII : 2011
Industrial Immunity	EN61000-6-2 : 2005
Protection Class	Variable/IP20
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL,FCC

3.1.5. Specification


Items																												
Input Specification																												
Inputs Per Module	4 Channels																											
Indicators	4 Green Input Status LEDs																											
Sensor Types	RTD Input Range																											
	<table border="1"> <thead> <tr> <th>RTD Input</th><th>Input Range</th></tr> </thead> <tbody> <tr> <td>PT100, PT200, PT500, PT50</td><td>-200~850°C</td></tr> <tr> <td>PT1000</td><td>-200~350°C</td></tr> <tr> <td>JPT100, JPT200, JPT500, JPT50</td><td>-200~640°C</td></tr> <tr> <td>JPT1000</td><td>-200~350°C</td></tr> <tr> <td>NI100, NI200, NI500</td><td>-60~250°C</td></tr> <tr> <td>NI1000</td><td>-60~180°C</td></tr> <tr> <td>NI120</td><td>-80~260°C</td></tr> <tr> <td>NI1000LG</td><td>-50~120°C</td></tr> <tr> <td>Resistance Input</td><td>Input Range</td></tr> <tr> <td>100mΩ/Bit</td><td>0~2000Ω</td></tr> <tr> <td>10mΩ/Bit</td><td>0~327Ω</td></tr> <tr> <td>20mΩ/Bit</td><td>0~620Ω</td></tr> <tr> <td>50mΩ/Bit</td><td>0~1200Ω</td></tr> </tbody> </table>	RTD Input	Input Range	PT100, PT200, PT500, PT50	-200~850°C	PT1000	-200~350°C	JPT100, JPT200, JPT500, JPT50	-200~640°C	JPT1000	-200~350°C	NI100, NI200, NI500	-60~250°C	NI1000	-60~180°C	NI120	-80~260°C	NI1000LG	-50~120°C	Resistance Input	Input Range	100mΩ/Bit	0~2000Ω	10mΩ/Bit	0~327Ω	20mΩ/Bit	0~620Ω	50mΩ/Bit
RTD Input	Input Range																											
PT100, PT200, PT500, PT50	-200~850°C																											
PT1000	-200~350°C																											
JPT100, JPT200, JPT500, JPT50	-200~640°C																											
JPT1000	-200~350°C																											
NI100, NI200, NI500	-60~250°C																											
NI1000	-60~180°C																											
NI120	-80~260°C																											
NI1000LG	-50~120°C																											
Resistance Input	Input Range																											
100mΩ/Bit	0~2000Ω																											
10mΩ/Bit	0~327Ω																											
20mΩ/Bit	0~620Ω																											
50mΩ/Bit	0~1200Ω																											
Excitation Current	About 1mA																											
Connection Method	3-Wire																											
Conversion Time	< 150ms, All Channel																											
Data Format	16 Bits singed Integer (2' complement)																											
Module Accuracy	PT100, PT1000 Type Input Range - 0.5°C Full Scale @ 25°C ambient																											
	All Type Input Range - ±0.1% Full Scale @ 25°C ambient - ±0.3% Full Scale @ -40, 70°C ambient																											
Resolution of Data	RTD Type : ±0.1°C / F, Resistance Type : 100mΩ, 10mΩ, 20mΩ, 50mΩ																											
Calibration	Not Required																											
Diagnostic	Sensor open or range over, then conversion data = 0x8000(-32768)																											
General Specification																												
Power Dissipation	Max. 130mA @ 5Vdc																											
Isolation	I/O to Logic : Photocoupler Isolation Field power : Not Connected																											
UL Filed Power	Supply voltage : 24Vdc nominal, Class 2																											

Field Power	Not used, Field Power passes through to the next module
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Torque	0.8Nm(7lb-in)
Weight	60g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to 'Environment Specification'

3.1.6 Mapping Data into the Image Table

" **Input Module Data**

Analog Input Ch0
Analog Input Ch1
Analog Input Ch2
Analog Input Ch3



" **Input Image Value**

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0				Analog Input Ch0 Low byte				
Byte 1				Analog Input Ch0 High byte				
Byte 2				Analog Input Ch1 Low byte				
Byte 3				Analog Input Ch1 High byte				
Byte 4				Analog Input Ch2 Low byte				
Byte 5				Analog Input Ch2 High byte				
Byte 6				Analog Input Ch3 Low byte				
Byte 7				Analog Input Ch3 High byte				

- If the input of channel is open or over-ranged, its conversion data will be 0x8000(-32678)

3.1.7. Configuration Parameter – 10 Bytes


Byte	Decimal Bit	Description	Default Value
0	00-07	The selection Sensor Type =00h:PT100, 0.00385, -200~850°C, 0.1°C /count =01h:PT200, 0.00385, -200~850°C, 0.1°C/count =02h:PT500, 0.00385, -200~850°C, 0.1°C/count =03h:PT1000, 0.00385, -200~350°C, 0.1°C/count =04h:PT50, 0.00385, -200~850°C, 0.1°C/count =10h:JPT100, 0.003916, -200~640°C, 0.1°C/count =11h:JPT200, 0.003916, -200~640°C, 0.1°C/count =12h:JPT500, 0.003916, -200~640°C, 0.1°C/count =13h:JPT1000, 0.003916, -200~350°C, 0.1°C/count =14h:JPT50, 0.003916, -200~640°C, 0.1°C/count =20h:NI100, 0.00618, -60~250°C, 0.1°C/count =21h:NI200, 0.00618, -60~250°C, 0.1°C/count =22h:NI500, 0.00618, -60~250°C, 0.1°C/count =23h:NI1000, 0.00618, -60~180°C, 0.1°C/count =30h:NI120, 0.00672, -80~250°C, 0.1°C/count =53h:NI1000LG, 0.00500, -50~120°C, 0.1°C/count =80h:Resistance Input, 1~2000Ω, 100mΩ /1count =81h:Resistance Input, 1~327Ω, 10mΩ /1count =82h:Resistance Input, 1~620Ω, 20mΩ /1count =83h: Resistance Input, 1~1200Ω, 50mΩ/1count =Others: Reserved	0: PT100
1	00	Temperature Type 0: Celsius(°C), 1: Fahrenheit(°F)	0: Celsius(°C)
	01	Reserved	0
	02	Data Resolution 0: 0.1°C, °F/Bit, 1: 1°C, °F/Bit	0
	03	Reserved	0
	04	Filter Type 0: Normal Filter, 1: Enhanced Filter	0: Normal Filter
	05-07	Reserved	0
2~3	-	CH0 Offset Value	0
4~5	-	CH1 Offset Value	0
6~7	-	CH2 Offset Value	0
8~9	-	CH3 Offset Value	0

3.1.8. Data Value

Resistance Temperature Detector Input Range	
Type	Input Range
PT100	-200 ~ 850 °C
PT200	-200 ~ 850 °C
PT500	-200 ~ 850 °C
PT1000	-200 ~ 350 °C
PT50	-200 ~ 850 °C
JPT100	-200 ~ 640 °C
JPT200	-200 ~ 640 °C
JPT500	-200 ~ 640 °C
JPT1000	-200 ~ 350 °C
JPT50	-200 ~ 640 °C
NI100	-60 ~ 250 °C
NI200	-60 ~ 250 °C
NI500	-60 ~ 250 °C
NI1000	-60 ~ 180 °C
NI120	-80 ~ 260 °C
NI1000LG	-50 ~ 120 °C
Resistance Input Range	
Type	Input Range
100mΩ/Bit	0~2000Ω
10mΩ/Bit	0~327Ω
20mΩ/Bit	0~620Ω
50mΩ/Bit	0~1200Ω


3.2. GT-3708

3.2.1. Wiring Diagram

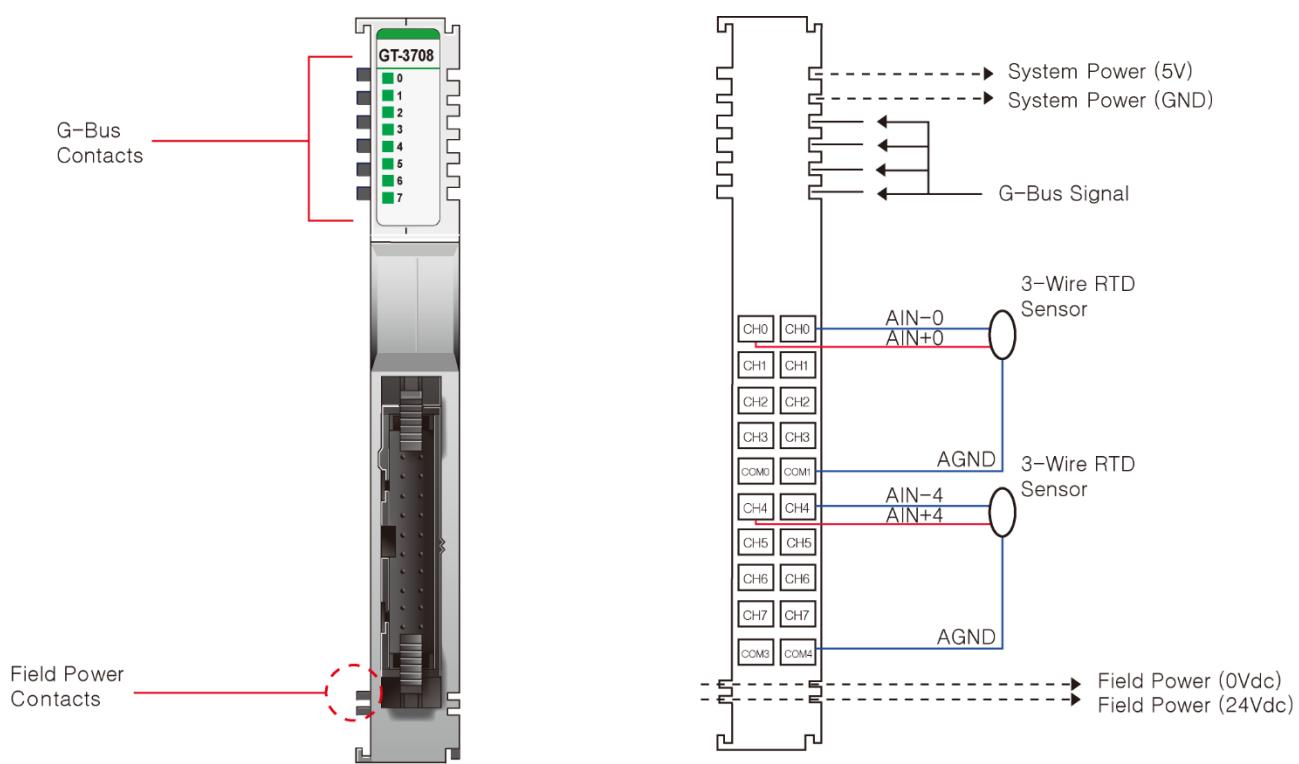

Pin No.	Signal Description	Signal Description	Pin No.
0	RTD Channel 0+	RTD Channel 0-	1
2	RTD Channel 1+	RTD Channel 1-	3
4	RTD Channel 2+	RTD Channel 2-	5
6	RTD Channel 3+	RTD Channel 3-	7
8	AGND	AGND	9
10	RTD Channel 4+	RTD Channel 4-	11
12	RTD Channel 5+	RTD Channel 5-	13
14	RTD Channel 6+	RTD Channel 6-	15
16	RTD Channel 7+	RTD Channel 7-	17
18	AGND	AGND	19

3.2.2. LED Indicator

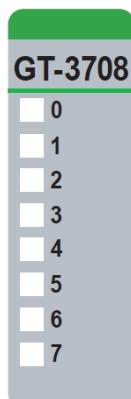

LED No.	LED Function / Description	LED Color
0	Input Channel 0	Green
1	Input Channel 1	Green
2	Input Channel 2	Green
3	Input Channel 3	Green
4	Input Channel 4	Green
5	Input Channel 5	Green
6	Input Channel 6	Green
7	Input Channel 7	Green

3.2.3. Channel Status LED

Status	LED	To indicate
No Signal	Off	Input Sensor Open or Input Range Over
Normal Operation	Off	Normal Operation
On Signal	Green	Sensor Connected and Input Range Valid
Normal Operation	Green	Normal Operation

3.2.4. Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 70°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% Non-condensing
Operationg Altitude	2,000m
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27 : 2008/ 15g, 11bs
Vibration Resistance	Based on IEC 60068-2-6 DNVGL-CG-0039 : 2016/ Vibration Class B, 4g
Industrial Emissions	EN61000-6-4/AII : 2011
Industrial Immunity	EN61000-6-2 : 2005
Protection Class	Variable/IP20
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL,FCC

3.2.5. Specification

Items		
Input Specification		
Inputs Per Module	8 Channels	
Indicators	8 Green Input Status LEDs	
Sensor Types	RTD Input Range	
	RTD Input	Input Range
	PT100, PT200, PT500, PT50	-200~850°C
	PT1000	-200~350°C
	JPT100, JPT200, JPT500, JPT50	-200~640°C
	JPT1000	-200~350°C
	NI100, NI200, NI500	-60~250°C
	NI1000	-60~180°C
	NI120	-80~260°C
	NI1000LG	-50~120°C
Excitation Current	Resistance Input	Input Range
	100mΩ/Bit	0~2000Ω
	10mΩ/Bit	0~327Ω
	20mΩ/Bit	0~620Ω
	50mΩ/Bit	0~1200Ω
Connection Method	About 1mA	
Conversion Time	3-Wire	
Data Format	280ms / All Channel	
Module Accuracy	16 Bits singed Integer (2' complement)	
Resolution of Data	PT100, PT1000 Type Input Range	
	- 0.5°C Full Scale @ 25°C ambient	
	All Type Input Range	
Calibration	- ±0.1% Full Scale @ 25°C ambient	
	- ±0.3% Full Scale @ -40, 70°C ambient	
Diagnostic	RTD Type : ±0.1°C / F, Resistance Type : 100mΩ, 10mΩ, 20mΩ, 50mΩ	
General Specification	Not Required	
Power Dissipation	Sensor open or range over, then conversion data = 0x8000(-32768)	
Isolation	Max. 120mA @ 5Vdc	
UL Field Power	I/O to Logic : Isolation	
Field Power	Field power : Not Connected	
	Supply voltage : 24Vdc nominal, Class 2	
	Not used, Field Power passes through to the next module	


Wiring	Connector Type, up to AWG22 Module Connector : HIF3BA-20D-2.54DSA
Weight	60g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to 'Environment Specification'

3.2.6. Mapping Data into the Image Table

" Input Module Data

Analog Input Ch0
Analog Input Ch1
Analog Input Ch2
Analog Input Ch3
Analog Input Ch4
Analog Input Ch5
Analog Input Ch6
Analog Input Ch7

" Input Image Value



Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0					Analog Input Ch0 Low byte			
Byte 1					Analog Input Ch0 High byte			
Byte 2					Analog Input Ch1 Low byte			
Byte 3					Analog Input Ch1 High byte			
Byte 4					Analog Input Ch2 Low byte			
Byte 5					Analog Input Ch2 High byte			
Byte 6					Analog Input Ch3 Low byte			
Byte 7					Analog Input Ch3 High byte			
Byte 8					Analog Input Ch4 Low byte			
Byte 9					Analog Input Ch4 High byte			
Byte 10					Analog Input Ch5 Low byte			
Byte 11					Analog Input Ch5 High byte			
Byte 12					Analog Input Ch6 Low byte			
Byte 13					Analog Input Ch6 High byte			
Byte 14					Analog Input Ch7 Low byte			
Byte 15					Analog Input Ch7 High byte			

- If the input of channel is open or over-ranged, its conversion data will be 0x8000(-32678)

3.2.7. Configuration Parameter – 18 Bytes

Byte	Decimal Bit	Description	Default Value
0	00-07	The selection Sensor Type =00h:PT100, 0.00385, -200~850°C, 0.1°C /count =01h:PT200, 0.00385, -200~850°C, 0.1°C/count =02h:PT500, 0.00385, -200~850°C, 0.1°C/count =03h:PT1000, 0.00385, -200~350°C, 0.1°C/count =04h:PT50, 0.00385, -200~850°C, 0.1°C/count =10h:JPT100, 0.003916, -200~640°C, 0.1°C/count =11h:JPT200, 0.003916, -200~640°C, 0.1°C/count =12h:JPT500, 0.003916, -200~640°C, 0.1°C/count =13h:JPT1000, 0.003916, -200~350°C, 0.1°C/count =14h:JPT50, 0.003916, -200~640°C, 0.1°C/count =20h:NI100, 0.00618, -60~250°C, 0.1°C/count =21h:NI200, 0.00618, -60~250°C, 0.1°C/count =22h:NI500, 0.00618, -60~250°C, 0.1°C/count =23h:NI1000, 0.00618, -60~180°C, 0.1°C/count =30h:NI120, 0.00672, -80~250°C, 0.1°C/count =53h:NI1000LG, 0.00500, -50~120°C, 0.1°C/count =80h:Resistance Input, 1~2000Ω, 100mΩ /1count =81h:Resistance Input, 1~327Ω, 10mΩ /1count =82h:Resistance Input, 1~620Ω, 20mΩ /1count =83h: Resistance Input, 1~1200Ω, 50mΩ/1count =Others: Reserved	0: PT100
1	00	Temperature Type 0: Celsius(°C), 1: Fahrenheit(°F)	0: Celsius(°C)
	01	Reserved	0
	02	Data Resolution 0: 0.1°C, °F/Bit, 1: 1°C, °F/Bit	0
	03	Reserved	0
	04	Filter Type 0: Normal Filter, 1: Enhanced Filter	0: Normal Filter
	05-07	Reserved	0
2~3	-	CH0 Offset Value	0
4~5	-	CH1 Offset Value	0
6~7	-	CH2 Offset Value	0
8~9	-	CH3 Offset Value	0
10~11	-	CH4 Offset Value	0
12~13	-	CH5 Offset Value	0
14~15	-	CH6 Offset Value	0
16~17	-	CH7 Offset Value	0

3.2.8. Data Value

Resistance Temperature Detector Input Range	
Type	Input Range
PT100	-200 ~ 850 °C
PT200	-200 ~ 850 °C
PT500	-200 ~ 850 °C
PT1000	-200 ~ 350 °C
PT50	-200 ~ 850 °C
JPT100	-200 ~ 640 °C
JPT200	-200 ~ 640 °C
JPT500	-200 ~ 640 °C
JPT1000	-200 ~ 350 °C
JPT50	-200 ~ 640 °C
NI100	-60 ~ 250 °C
NI200	-60 ~ 250 °C
NI500	-60 ~ 250 °C
NI1000	-60 ~ 180 °C
NI120	-80 ~ 260 °C
NI1000LG	-50 ~ 120 °C
Resistance Input Range	
Type	Input Range
100mΩ/Bit	0~2000Ω
10mΩ/Bit	0~327Ω
20mΩ/Bit	0~620Ω
50mΩ/Bit	0~1200Ω

3.3. GT-3804

3.3.1. Wiring Diagram


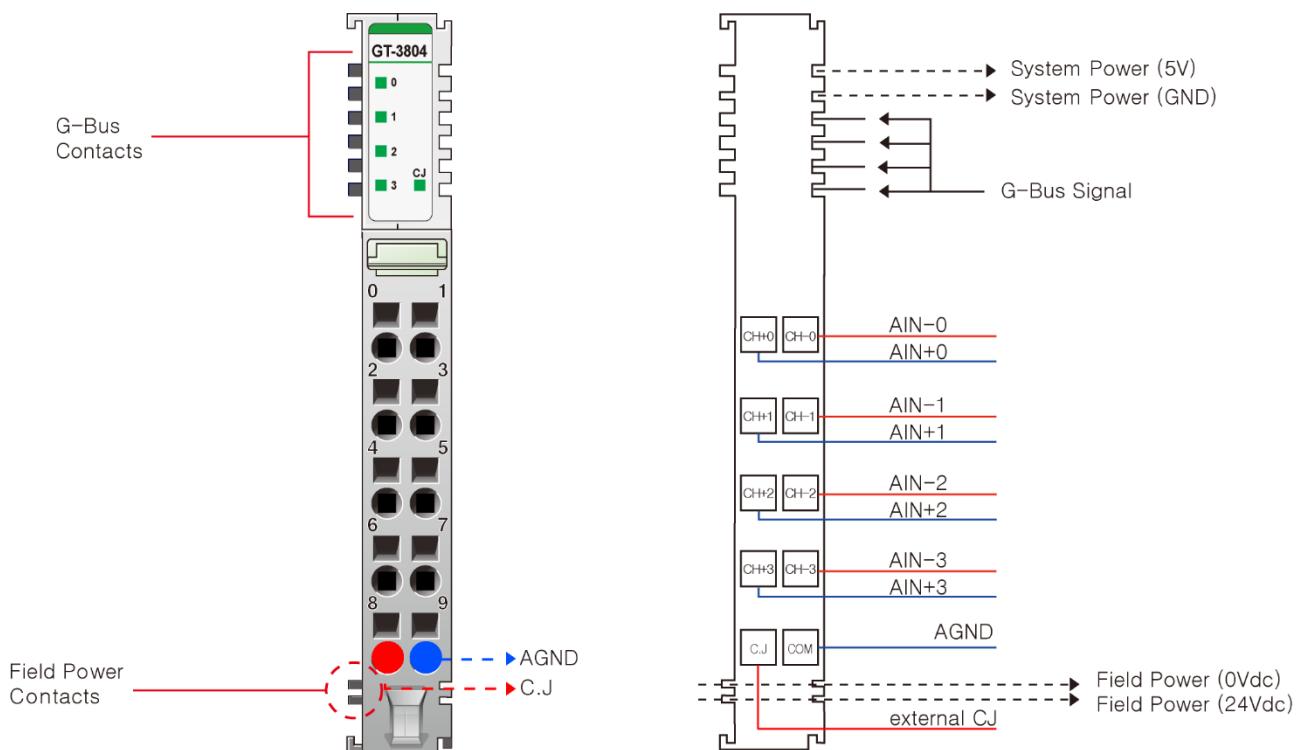


Figure 1. Customer Wiring to Mounting Base

Pin No.	Signal Description	Signal Description	Pin No.
0	TC Channel 0+	TC Channel 0-	1
2	TC Channel 1+	TC Channel 1-	3
4	TC Channel 2+	TC Channel 2-	5
6	TC Channel 3+	TC Channel 3-	7
8	CJ	AGND	9

3.3.2. LED Indicator

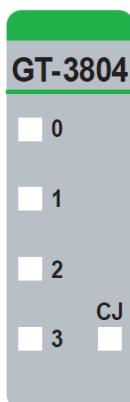

LED No.	LED Function / Description	LED Color
0	Input Channel 0	Green
1	Input Channel 1	Green
2	Input Channel 2	Green
3	Input Channel 3	Green
CJ	Input Channel CJ	Green

3.3.2. Channel Status LED

Status	LED	To indicate
No Signal	Channel LED Off, CJ LED Off	Input Sensor Open or Input Range Over
Normal Operation		Normal Operation
On Signal	Channel LED On, CJ LED Off	Sensor Connected and Input Range Valid
Normal Operation		Normal Operation
On Signal	Channel LED On, CJ LED On	Sensor Connected and Input Range Valid
Normal Operation		Normal Operation
Connected External CJC		External CJ Enable

3.3.4. Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 70°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% Non-condensing
Operationg Altitude	2,000m
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27 : 2008/ 15g, 11bs
Vibration Resistance	Based on IEC 60068-2-6 DNVGL-CG-0039 : 2016/ 6 vibration Class B, 4g
Industrial Emissions	EN61000-6-4/AII : 2011
Industrial Immunity	EN61000-6-2 : 2005
Protection Class	Variable/IP20
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL,FCC

3.3.5. Specification

Items	Specification				
Input Specification					
Inputs Per Module	4 Channels				
Indicators	4 Green Input Status LEDs , 1 Green Input CJ Status LED				
Sensor Types	Thermal Couple Input Range	Type	Maximum Input Range		
	K	-270 ~ 1372°C	-200 ~ 1200°C		
	J	-210 ~ 1200°C	-40 ~ 1100°C		
	T	-270 ~ 400°C	-200 ~ 350°C		
	B	30 ~ 1820°C	600 ~ 1700°C		
	R	-50~1768°C	0 ~ 1600°C		
	S	-50 ~ 1768°C	0 ~ 1600°C		
	E	-270 ~ 1000°C	-200 ~ 800°C		
	N	-270 ~ 1300°C	-200 ~ 1250°C		
	L	-200 ~ 900°C	-100 ~ 850°C		
	U	-200 ~ 600°C	-100 ~ 550°C		
	C	0 ~ 2310°C	100 ~ 2100°C		
	D	0 ~ 2490°C	100 ~ 2200°C		
	10uV Input	-81.0 ~ 81.0mV, 10uV/1 Count			
	1uV Input	-32.7 ~ 32.7mV, 1uV/1 Count			
	2uV Input	-65.5 ~ 65.5mV, 2uV/1 Count			
Module Accuracy (Need 20 minute preheating to get enhanced accuracy.)	Recommend Input Range - ±0.1% Recommended Scale @ 25°C ambient - ±0.3% Recommended Scale @ -40°C~70°C C/D Type Recommend Input Range - ±0.3% Recommended Scale @ -40°C~70°C External Cold Junction(PT100) - ± 2°C Recommended Scale @ -40°C~70°C				
Connection Method	2-Wire				
Conversion Time	Average Conversion Time < 30ms				
Data Format	16 Bits Integer (2' complement)				
Calibration	Not Required				
Cold Junction Temperature	Internal - TMP275AIDGKR : -40°C~125°C External				


	- PT100 : -45°C~95°C
Calibration	Not Required
Diagnostic	Sensor open or range over, then conversion data = 0x8000(-32768) *Connected External CJ : CJ LED On. Not Connected External CJ : CJ LED Off.
General Specification	
Power Dissipation	Max. 130mA @ 5Vdc
Isolation	I/O to Logic : Isolation Field power : Not Connected
UL Field Power	Supply voltage : 24Vdc nominal, Class 2
Field Power	Not used, Field Power passes through to the next module
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Torque	0.8Nm(7lb-in)
Weight	60g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to 'Environment Specification'

* To increase precision of measurement, the connection between GT-3804 and compensation reference sensor is recommended using by terminal block.

3.3.6 Mapping Data into the Image Table

" Input Module Data

Analog Input Ch0
Analog Input Ch1
Analog Input Ch2
Analog Input Ch3



" Input Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0					Analog Input Ch0 Low byte			
Byte 1					Analog Input Ch0 High byte			
Byte 2					Analog Input Ch1 Low byte			
Byte 3					Analog Input Ch1 High byte			
Byte 4					Analog Input Ch2 Low byte			
Byte 5					Analog Input Ch2 High byte			
Byte 6					Analog Input Ch3 Low byte			
Byte 7					Analog Input Ch3 High byte			

- If the input of channel is open or over-ranged, its conversion data will be 0x8000(-32678)

3.3.7. Configuration Parameter – 8 Bytes

Byte	Decimal Bit	Description	Default Value
0	00-07	The selection Sensor Type =00h: Type K, 0.1°C/count =01h: Type J, 0.1°C/count =02h: Type T, 0.1°C/count =03h: Type B, 0.1°C/count =04h: Type R, 0.1°C/count =05h: Type S, 0.1°C/count =06h: Type E, 0.1°C/count =07h: Type N, 0.1°C/count =08h: Type L, 0.1°C/count =09h: Type U, 0.1°C/count =0Ah: Type C, 0.1°C/count =0Bh: Type D, 0.1°C/count =80h: 10uV Input, -81.0~81.0mV, 10uV / 1count =81h: 1uV Input, -32.7~32.7mV, 1uV / 1count =82h: 2uV Input, -65.5~65.5mV, 2uV / 1count =Others: Reserved	00 : Type K
1	00	Temperature Type 0: Celsius(°C), 1: Fahrenheit(°F)	00 : Celsius(°C) ColdJunction Compensation 0.1°C Normal Filter
	01*	0: Cold Junction Compensation 1: Disable Cold Junction Compensation	
	02	Data Resolution 0: 0.1°C, °F/bit, 1: 1°C, °F/bit	
	03	Reserved	
	04	Filter Type 0: Normal Filter, 1: Enhanced Filter	
	05-07	Reserved	
2	00-07	Internal Cold Junction[1] Offset Data Low Byte	0000
3	00-07	Internal Cold Junction[1] Offset Data High Byte	
4	00-07	Internal Cold Junction[2] Offset Data Low Byte	0000
5	00-07	Internal Cold Junction[2] Offset Data High Byte	
6	00-07	External Cold Junction Offset Data Low Byte	0000
7	00-07	External Cold Junction Offset Data High Byte	

- Unit of Cold Junction Temperature is 0.1°C/°F. Value 254 means 25.4°C or 25.4°F
- *0: Compensation ColdJunction Temperature = ColdJunction Temperature–ColdJunction Temperature Offset
- *1: Compensation Cold Junction Temperature = Cold Junction Temperature Offset
- *If you set a fast filter, the specification accuracy may not be met.

3.3.8. Data Value

Thermocouple Input Range		
Type	Maximum Input Range	Recommended Input Range
Type K	-270 ~ 1372 °C	-200 ~ 1200 °C
Type J	-210 ~ 1200 °C	-40 ~ 1100 °C
Type T	-270 ~ 400 °C	-200 ~ 350 °C
Type B	30 ~ 1820 °C	600 ~ 1700 °C
Type R	-50 ~ 1768 °C	0 ~ 1600 °C
Type S	-50 ~ 1768 °C	0 ~ 1600 °C
Type E	-270 ~ 1000 °C	-200 ~ 800 °C
Type N	-270 ~ 1300 °C	-200 ~ 1250 °C
Type L	-200 ~ 900 °C	-100 ~ 850 °C
Type U	-200 ~ 600 °C	-100 ~ 550 °C
Type C	0 ~ 2310 °C	100 ~ 2100 °C
Type D	0 ~ 2490 °C	100 ~ 2200 °C
10uV	-81.0 ~ 81.0mV, 10uV/ 1 Count	
1uV	-32.7 ~ 32.7mV, 1uV/ 1 Count	
2uV	-65.5 ~ 65.5mV, 2uV/ 1 Count	

- °F = 1.8°C+32

3.4. GT-3808

3.4.1. Wiring Diagram


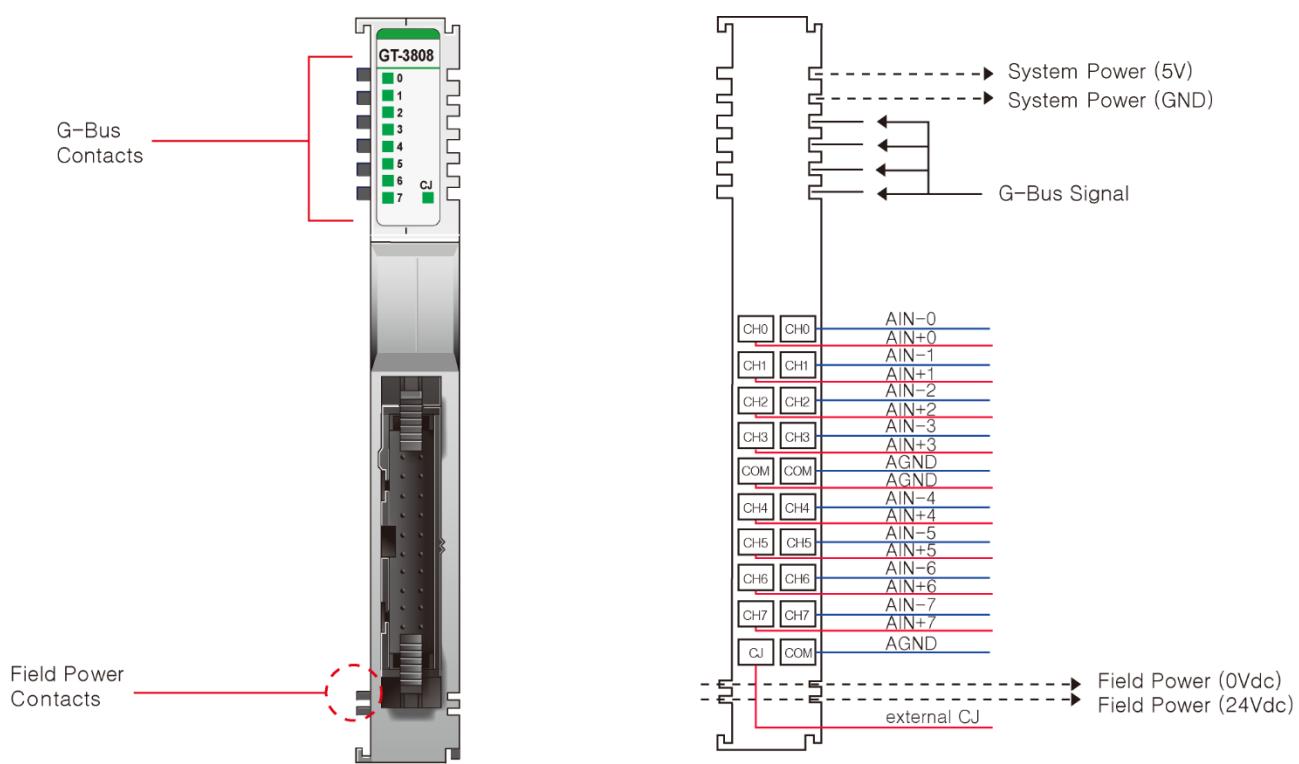


Figure 1. Customer Wiring to Mounting Base

Pin No.	Signal Description	Signal Description	Pin No.
0	TC Channel 0+	TC Channel 0-	1
2	TC Channel 1+	TC Channel 1-	3
4	TC Channel 2+	TC Channel 2-	5
6	TC Channel 3+	TC Channel 3-	7
8	AGND	AGND	9
10	TC Channel 4+	TC Channel 4-	11
12	TC Channel 5+	TC Channel 5-	13
14	TC Channel 6+	TC Channel 6-	15
16	TC Channel 7+	TC Channel 7-	17
18	Cold Junction Sensor	AGND	19

3.4.2 LED Indicator

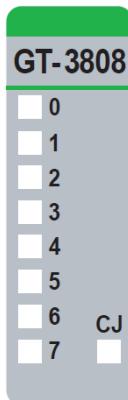

LED No.	LED Function / Description	LED Color
0	Input Channel 0	Green
1	Input Channel 1	Green
2	Input Channel 2	Green
3	Input Channel 3	Green
4	Input Channel 4	Green
5	Input Channel 5	Green
6	Input Channel 6	Green
7	Input Channel 7	Green
CJ	Input Channel CJ	Green

3.4.3. Channel Status LED

Status	LED	To indicate
No Signal	Channel Off, CJ Off	Input Sensor Open or Input Range Over
Normal Operation		Normal Operation
On Signal	Channel On, CJ Off	Sensor Connected and Input Range Valid
Normal Operation		Normal Operation
On Signal	Channel On, CJ On	Sensor Connected and Input Range Valid
Normal Operation		Normal Operation
Connected External CJC		External CJ Enable

3.4.4. Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 70°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% Non-condensing
Operationg Altitude	2,000m
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27 : 2008/ 15g, 11bs
Vibration Resistance	Based on IEC 60068-2-6 DNVGL-CG-0039 : 2016/ 6 vibration Class B, 4g
Industrial Emissions	EN61000-6-4/AII : 2011
Industrial Immunity	EN61000-6-2 : 2005
Protection Class	Variable/IP20
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL,FCC

3.4.5. Specification


Items	Specification				
Input Specification					
Inputs Per Module	8 Channels				
Indicators	8 Green Input Status LEDs , 1 Green Input CJ Status LED				
Sensor Types	Thermal Couple Input Range				
	Type	Maximum Input Range	Recommended Input Range		
	K	-270 ~ 1372°C	-200 ~ 1200°C		
	J	-210 ~ 1200°C	-40 ~ 1100°C		
	T	-270 ~ 400°C	-200 ~ 350°C		
	B	30 ~ 1820°C	600 ~ 1700°C		
	R	-50~1768°C	0 ~ 1600°C		
	S	-50 ~ 1768°C	0 ~ 1600°C		
	E	-270 ~ 1000°C	-200 ~ 800°C		
	N	-270 ~ 1300°C	-200 ~ 1250°C		
	L	-200 ~ 900°C	-100 ~ 850°C		
	U	-200 ~ 600°C	-100 ~ 550°C		
	C	0 ~ 2310°C	100 ~ 2100°C		
	D	0 ~ 2490°C	100 ~ 2200°C		
Module Accuracy (Need 20 minute preheating to get enhanced accuracy.)	10uV Input	-81.0 ~ 81.0mV, 10uV/1 Count			
	1uV Input	-32.7 ~ 32.7mV, 1uV/1 Count			
	2uV Input	-65.5 ~ 65.5mV, 2uV/1 Count			
Connection Method	2-Wire				
Conversion Time	Average Conversion Time < 50ms				
Data Format	16 Bits Integer (2' complement)				
Calibration	Not Required				
Cold Junction Temperature	Internal				
	- TMP275AIDGKR : -40°C~125°C				
Calibration	External				
	- PT100 : -45°C~95°C				
General Specification	Not Required				

Power Dissipation	Max. 150mA @ 5Vdc
Isolation	I/O to Logic : Isolation Field Power : Not Connected
UL Field Power	Supply voltage : 24Vdc nominal, Class 2
Field Power	Not used, Field Power passes through to the next module
Wiring	Connector Type, up to AWG22 Module Connector : HIF3BA-20D-2.54DSA
Weight	60g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to 'Environment Specification'

3.4.6. Mapping Data into the Image Table

" Input Module Data

Analog Input Ch0
Analog Input Ch1
Analog Input Ch2
Analog Input Ch3
Analog Input Ch4
Analog Input Ch5
Analog Input Ch6
Analog Input Ch7



" Input Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0				Analog Input Ch0 Low byte				
Byte 1				Analog Input Ch0 High byte				
Byte 2				Analog Input Ch1 Low byte				
Byte 3				Analog Input Ch1 High byte				
Byte 4				Analog Input Ch2 Low byte				
Byte 5				Analog Input Ch2 High byte				
Byte 6				Analog Input Ch3 Low byte				
Byte 7				Analog Input Ch3 High byte				
Byte 8				Analog Input Ch4 High byte				
Byte 9				Analog Input Ch4 High byte				
Byte 10				Analog Input Ch5 High byte				
Byte 11				Analog Input Ch5 High byte				
Byte 12				Analog Input Ch6 High byte				
Byte 13				Analog Input Ch6 High byte				
Byte 14				Analog Input Ch7 High byte				
Byte 15				Analog Input Ch7 High byte				

- If the input of channel is open or over-ranged, its conversion data will be 0x8000(-32678)

3.4.7. Configuration Parameter – 8 Bytes

Byte	Decimal Bit	Description	Default Value
0	00-07	The selection Sensor Type =00h: Type K, 0.1°C/count =01h: Type J, 0.1°C/count =02h: Type T, 0.1°C/count =03h: Type B, 0.1°C/count =04h: Type R, 0.1°C/count =05h: Type S, 0.1°C/count =06h: Type E, 0.1°C/count =07h: Type N, 0.1°C/count =08h: Type L, 0.1°C/count =09h: Type U, 0.1°C/count =0Ah: Type C, 0.1°C/count =0Bh: Type D, 0.1°C/count =80h: 10uV Input, -81.0~81.0mV, 10uV / 1count =81h: 1uV Input, -32.7~32.7mV, 1uV / 1count =82h: 2uV Input, -65.5~65.5mV, 2uV / 1count =Others: Reserved	00 : Type K
1	00	Temperature Type 0: Celsius(°C), 1: Fahrenheit(°F)	00 : Celsius(°C) Cold Junction Compensation 0.1 °C Normal Filter
	01*	0: Cold Junction Compensation 1: Disable Cold Junction Compensation	
	02	Data Resolution 0: 0.1 °C, °F/bit, 1: 1 °C, °F/bit	
	03	Reserved	
	04	Filter Type 0: Normal Filter, 1: Enhanced Filter	
	05-07	Reserved	
2	00-07	Internal Cold Junction[1] Offset Data Low Byte	0000
3	00-07	Internal Cold Junction[1] Offset Data High Byte	
4	00-07	Internal Cold Junction[2] Offset Data Low Byte	0000
5	00-07	Internal Cold Junction[2] Offset Data High Byte	
6	00-07	External Cold Junction Offset Data Low Byte	0000
7	00-07	External Cold Junction Offset Data High Byte	

- Unit of Cold Junction Temperature is 0.1 °C/°F. Value 254 means 25.4 °C or 25.4 °F
- *0: Compensation Cold Junction Temperature = Cold Junction Temperature – Cold Junction Temperature Offset
- *1: Compensation Cold Junction Temperature = Cold Junction Temperature Offset



3.4.8. Data Value


Thermocouple Input Range		
Type	Maximum Input Range	Recommended Input Range
Type K	-270 ~ 1372 °C	-200 ~ 1200 °C
Type J	-210 ~ 1200 °C	-40 ~ 1100 °C
Type T	-270 ~ 400 °C	-200 ~ 350 °C
Type B	30 ~ 1820 °C	600 ~ 1700 °C
Type R	-50 ~ 1768 °C	0 ~ 1600 °C
Type S	-50 ~ 1768 °C	0 ~ 1600 °C
Type E	-270 ~ 1000 °C	-200 ~ 800 °C
Type N	-270 ~ 1300 °C	-200 ~ 1250 °C
Type L	-200 ~ 900 °C	-100 ~ 850 °C
Type U	-200 ~ 600 °C	-100 ~ 550 °C
Type C	0 ~ 2310 °C	100 ~ 2100 °C
Type D	0 ~ 2490 °C	100 ~ 2200 °C
10uV	-81.0 ~ 81.0mV, 10uV/ 1 Count	
1uV	-32.7 ~ 32.7mV, 1uV/ 1 Count	
2uV	-65.5 ~ 65.5mV, 2uV/ 1 Count	

°F = 1.8°C+32

4. Dimension




4.1. GT-3xx4(RTB), GT-3xx8(RTB)

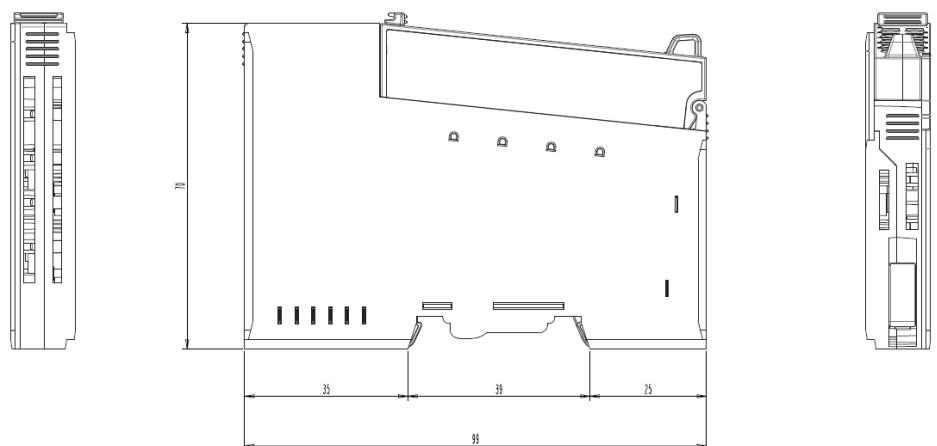

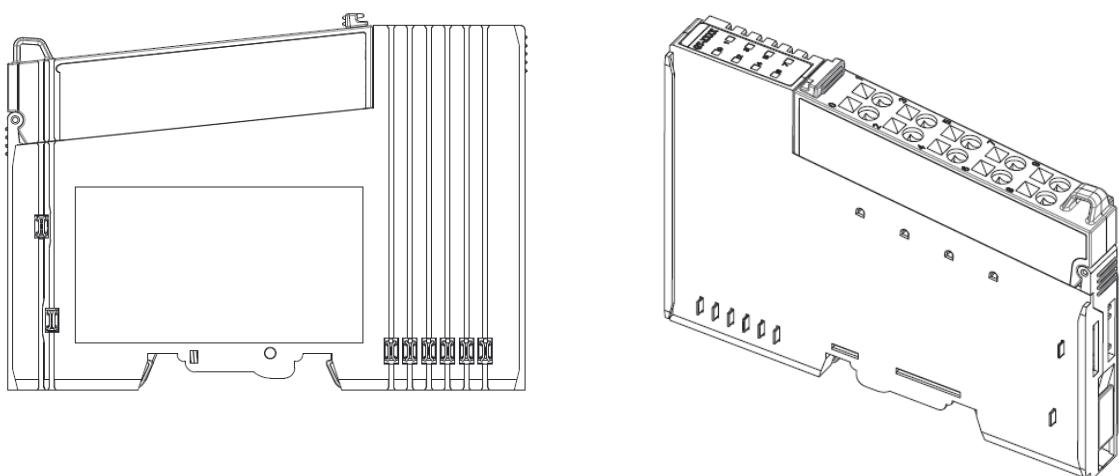

4.2. GT-3xxF(Connector)

(mm)

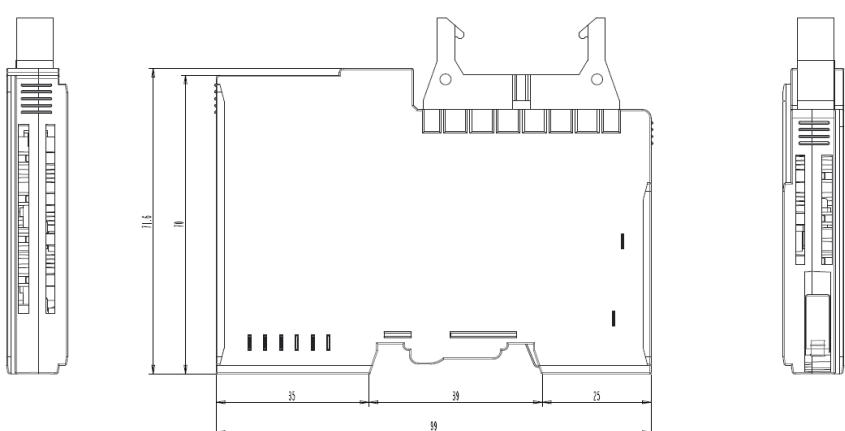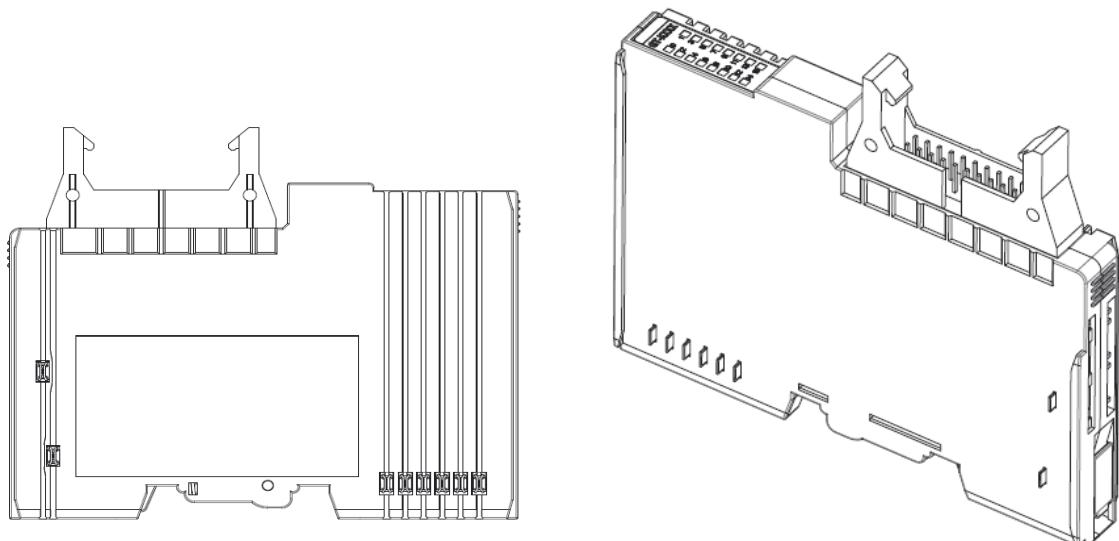

5. Mounting

Caution!

" Hot surface!"


The surface of the housing can become hot during operation. If the device was operated at high ambient temperatures, allow it to be cool before touching it.

Notice!

" Perform work on devices only if they are de-energized!"

Working on energized devices can damage them. Therefore, turn off the power supply before working on the devices.



5.1. I/O Inserting and Removing Devices

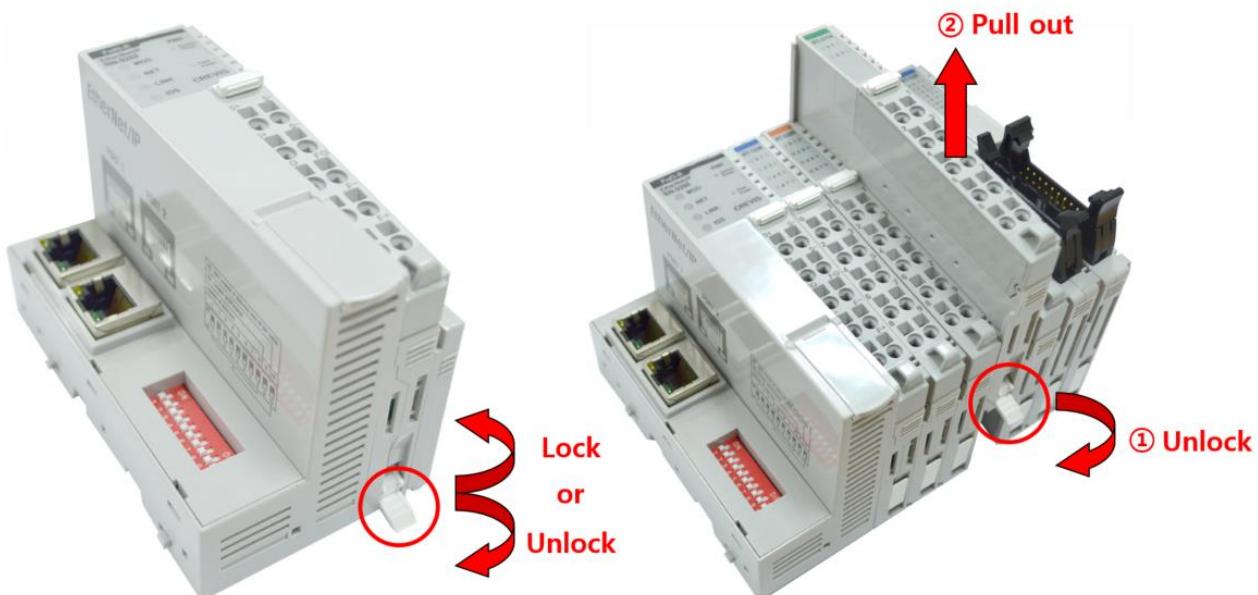

- As above figure in order to safeguard the G-Series module from jamming, it should be fixed onto the DIN rail with locking level. To do so, fold on the upper of the locking lever.

To pull out the G-Series module, unfold the locking lever as below figure.


5.2. RTB (Removable Terminal Block)

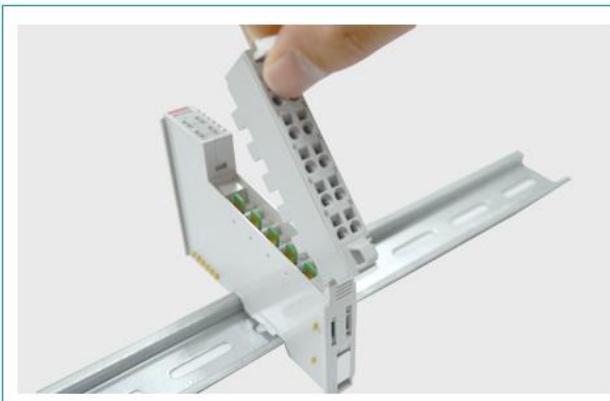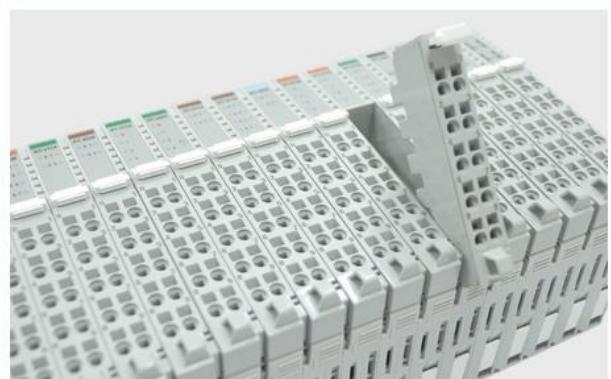

- " Whole terminal block can be combined and removed for the convenience.
- " There is a locking switch on the RTB for the easy combination and easy removal.
- " Easy combination and easy removal for IO modules on the din rail through One Touch Locking Switch.

6. G-Bus Pin Description

Communication between the GN series and the expansion module as well as system / field power supply of the bus modules is carried out via the internal bus. It is comprised of 6 data pin and 2 field power pin.

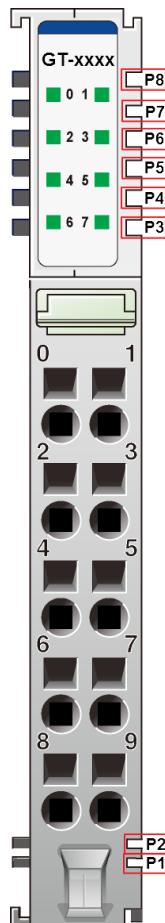

*Please refer to the table below regarding the pin description from P1 to P8.

No.	Description
P1	Field Power (VCC)
P2	Field Power (GND)
P3	GBUS CLK
P4	GBUS MISO
P5	GBUS MOSI
P6	GBUS Token
P7	System Power (GND)
P8	System Power (VCC)

DANGER



Do not touch data and field power pins in order to avoid soiling and damage by ESD noise.