

TSW304

DIN RAIL SWITCH



TSW304 360° VIEW

// TSW304 is Teltonika Networks' first unmanaged switch with an integrated, built-in DIN rail mount.

// Equipped with four Gigabit Ethernet ports supporting the IEEE 802.3, IEEE 802.3u, and 802.3az Ethernet standards.

// Designed with easy installation in mind, the TSW304 features a compact size with a shock-resistant casing to go along with its integrated DIN mount.

// 10/100/1000 Mbps Ethernet ports for economical, high-bandwidth solutions to provide reliable data throughput.

// 2-pin industrial power socket and wide range of supported power supply voltages (7-57 VDC and 9-40 VAC).



DIN RAIL

Built-in, integrated DIN mounting

COMPACT

102 x 25 x 81.5 mm

ETHERNET

4 x Gigabit Ethernet with speeds of up to 1000 Mbps

7-57 V

Wide range of supported power supply voltages



KEY FEATURES

HARDWARE


Powering option	2-pin power socket, 7 - 57 VDC / 9 - 40 VAC
Power consumption	Idle: < 0.26 W, Max: < 1.44 W
Ethernet	4 x 10/100/1000 Ethernet ports
Status LEDs	8 x Ethernet, 1 x Power
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with wall or DIN rail mounting option and grounding capability
Installation	DIN Rail mountable (no additional kit needed)


PERFORMANCE SPECIFICATIONS

Dimensions	102 x 25 x 81.5 mm
Weight	210 g
Bandwidth	8 Gbps
Packet buffer	128 KB
Jumbo frame support	9216 bytes
MAC address table size	2K entries
Auto MDI/ MDI-X Cable Detection	Yes

FRONT VIEW

BACK VIEW

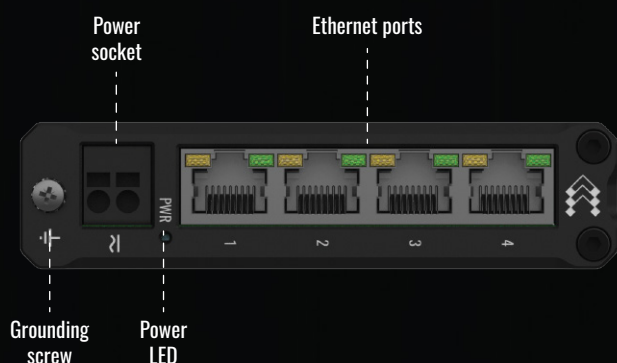



IP SYSTEMES
8 rue du Colonel Chambonnet – BP67
69672 BRON Cedex
Tel. : 04 72 14 18 00
Fax : 04 72 14 18 01
www.ip-systemes.com – info@ip-systemes.fr