



# Instructions for 8" and 10" Single Charging Base

## DC19T User Manual



### IP SYSTEMES

8 rue du Colonel Chambonnet – BP67

69672 BRON Cedex

Tel. : 04 72 14 18 00

Fax : 04 72 14 18 01

[www.ip-systemes.com](http://www.ip-systemes.com) – [info@ip-systemes.fr](mailto:info@ip-systemes.fr)


# Contents

I . Product Introduction .....	1
1. Appearance description .....	1
2. Indicator instruction .....	2
II. Instruction for use .....	2
1. Charge .....	2
2. Expansion interface .....	3
III. Specifications .....	4


# I . Product Introduction

## 1. Appearance description

Back view:

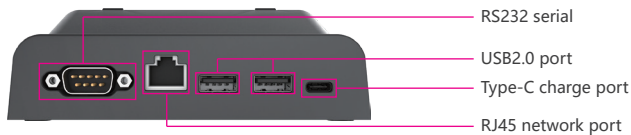

Top view:

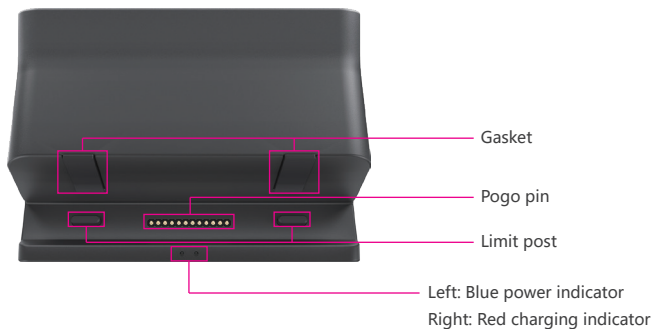

## 2. Indicator instruction

2.1 Power plug in indicator. When the docking connect to the power supply, the blue power plug in indicator will light up.

2.2 Device connect indicator. When the device put on the docking and is being charged. The red device connect indicator will light up.

## 二、 Instruction for use

### 1. Charge

Please use the standard 9V/2A adapter to charge the docking and tablet.




## 2. Expansion interface

1. The back of docking station has two standard USB2.0 ports, one RJ45 network port, one RS232 serial port and one Type-C port (only for charge). If you want to use USB, RJ45 or RS232, the docking must be connected to power, otherwise it cannot be used.



2. The OTG mode of the tablet is not turned on. The Type-C-OTG of tablet cannot be used when the docking is connected.

The OTG mode of the tablet is turned on, the Type-C-OTG on the body and the interface on the docking can be used at the same time. However, when the tablet is connected to the docking, the ports need to be reset for 3 seconds, during which time all ports are unavailable.



### III. Specifications

Interface	Type-C	5V/3A x1
	USB2.0	4pin x1
	RJ45	10/100M x1
	Serial port	RS232 9pin x1
Indicator light	Status indicator	Power indicator: Blue x1
		Charging indicator light: Red x1