



Docking of 10-12 inch devices and the battery

) # K



IP SYSTEMES

8 rue du Colonel Chambonnet – BP67

69672 BRON Cedex

Tel. : 04 72 14 18 00

Fax : 04 72 14 18 01

www.ip-systemes.com – info@ip-systemes.fr


Contents

| | |
|---------------------------------|---|
| I . Product Introduction | 1 |
| 1. Appearance description | 1 |
| 2. Indicator instruction | 2 |
| II. Instruction for use | 2 |
| 1. Recharge | 2 |
| 2. Expansion interface | 3 |


I . Product Introduction

1. Appearance description

Back view:

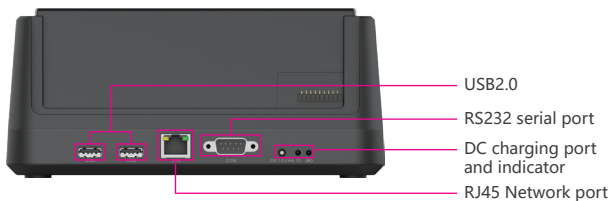

Top view:

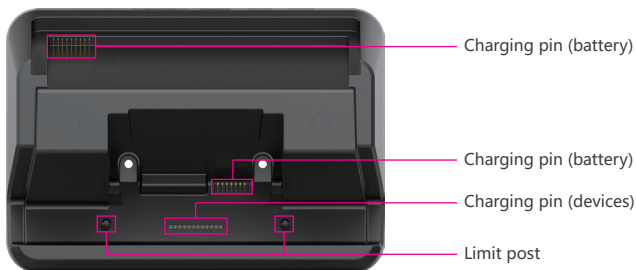

2. Indicator light description

2.1 Power Indicator. It stays on when DC power is connected.

2.2 Battery charging indicator. It stays on when the battery is connected and it is normally charged.

2.3 RJ45 network port indicator (left yellow, right green). It is always on when the power is connected, which means the network port is available.

II. Instruction for use

1. Recharge

1.1 Charge the devices.



1.2 Charge the battery.



2. Expansion interface

The docking of DC22 module is equipped with 5 interfaces: 1 DC port, 2 USB2.0 port, 1 RJ45 network port and 1 RS232 serial port. USB2.0, RJ45 and RS232 can work only when the DC power supply is connected.