



Docking of 10-12 inch devices and the battery DC22H User manual



IP SYSTEMES
8 rue du Colonel Chambonnet – BP67
69672 BRON Cedex
Tel. : 04 72 14 18 00
Fax : 04 72 14 18 01
www.ip-systemes.com – info@ip-systemes.fr


Contents

| | |
|-------------------------------------|---|
| One, Product Introduction..... | 3 |
| 1. Appearance description | 3 |
| 2. Indicator light description..... | 4 |
| Two, Instruction for use | 4 |
| 1. Recharge..... | 4 |
| 2. Expansion interface | 5 |


One, Product Introduction

1. Appearance description

Back view:

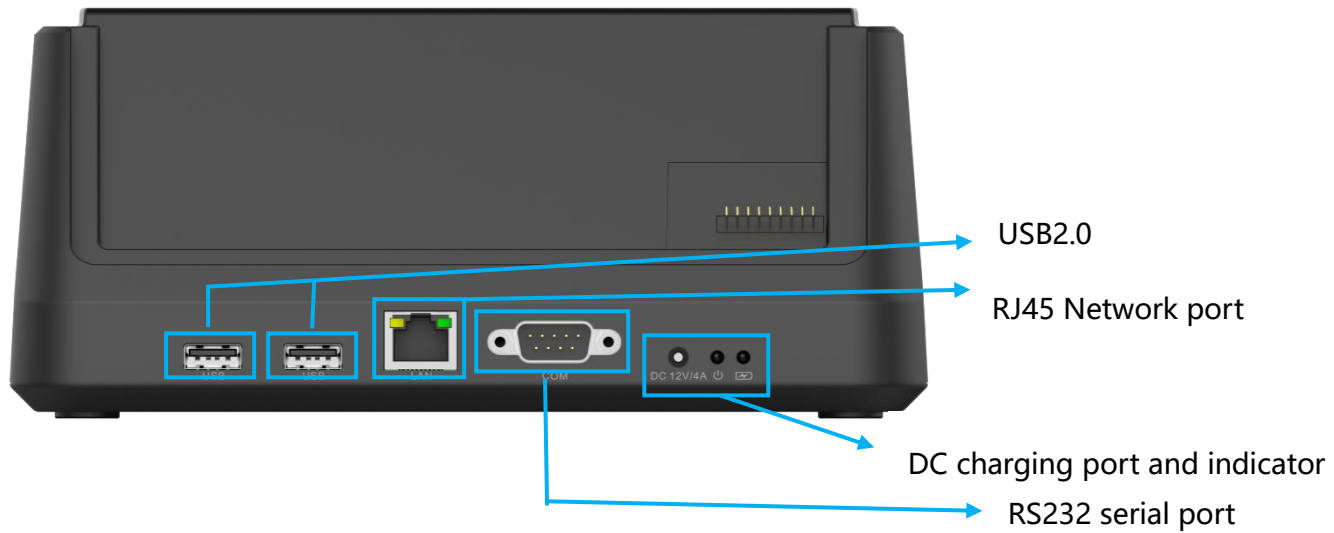

Top view:

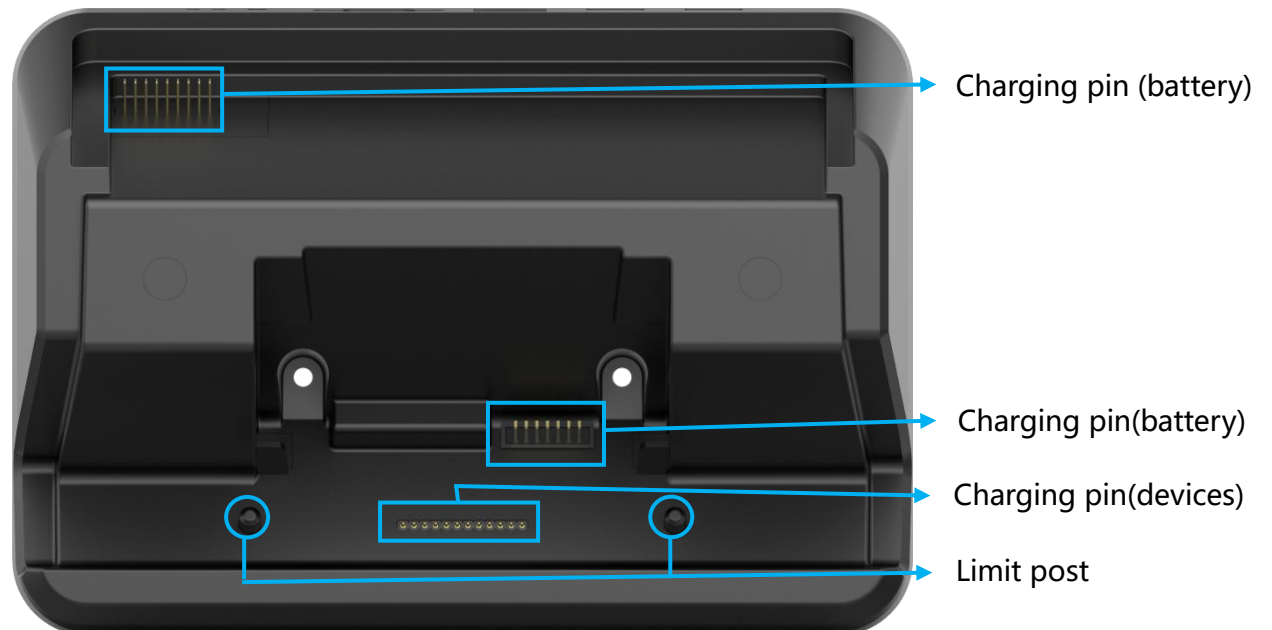

2. Indicator light description

2.1 Power Indicator. It stays on when DC power is connected.

2.2 Battery charging indicator. It stays on when the battery is connected and it is normally charged.

2.3 RJ45 network port indicator (left yellow, right green). It is always on when the power is connected, which means the network port is available.

Two, Instruction for use

1. Recharge

1.1 Charge the devices. Charge the devices Q22M/Q225M.



1.2 Charge the battery.

- (1) Charge the battery of Q22M/Q225M tablets.



2. Expansion interface

The docking of DC22H module is equipped with 5 interfaces: 1 DC port, 2 USB2.0 port, 1 RJ45 network port and 1 RS232 serial port. USB2.0, RJ45 and RS232 can work only when the DC power supply is connected.