



Station d'accueil pour tablettes PDA 4" à 6" DC62



IP SYSTEMES
8 rue du Colonel Chambonnet – BP67
69672 BRON Cedex
Tel.: 04 72 14 18 00
Fax: 04 72 14 18 01
www.ip-systemes.com – info@ip-systemes.fr


Contents

I . Product Introduction	1
1. Appearance description	1
2. Indicator instruction	2
II. Instruction for use	3
1. Recharge	3
2. Expansion interface	4


I . Product Introduction

1. Appearance description


Front view:

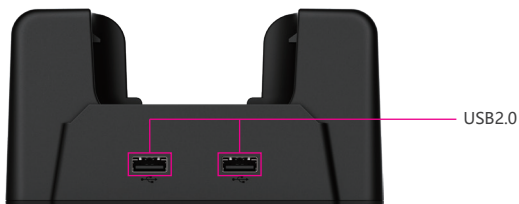

Top view:

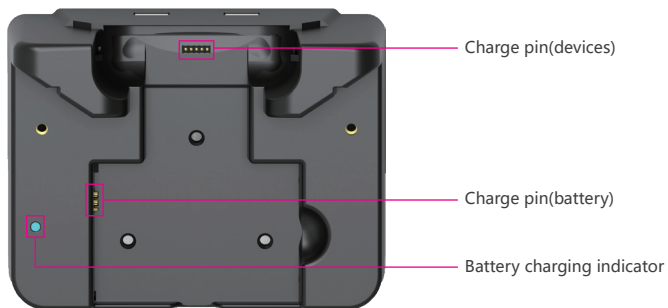

Bottom view:

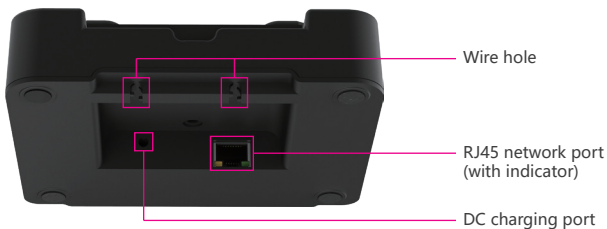

2. Indicator instruction

2.1 Battery charging indicator (green). The indicator light flashes once when the docking is connected to DC power. It stays on when the battery is connected and normally charged.

2.2 RJ45 Network port indicator (left is yellow, right is green). It stays on when the power is plugged in, which means the network port is usable.

II. Instruction for use

1. Recharge

1.1 Charge the devices.

DC42, DC52 and DC62 are similar in structure, but their sizes are different. DC42 can only charge devices of 42 module. DC52 can only charge devices of 52 module. DC62 can only charge devices of 62 module.



DC42



DC52



DC62

1.2 Charge the battery.



DC42



DC52



DC62

1.3 Charge the device and the battery.



DC62

2. Expansion interface

The docking of DC42/52/62 module is equipped with 4 interfaces: 1 DC port, 2 USB2.0 ports, and 1 RJ45 port. USB2.0 and RJ45 can work only when the DC power supply is connected.