


tBOX520 NEW

Fanless Embedded System with 12th Gen Intel® Core™ i7/i5/i3 Processor for Railway

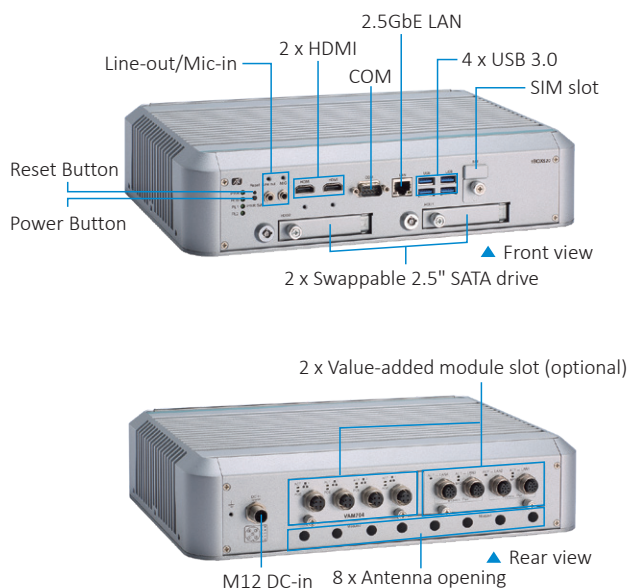

Features

- CE, LVD, FCC, EN 50155, EN 45545-2 certified
- 12th gen Intel® Core™ i7/i5/i3 or Celeron® processor (Alder Lake-U)
- 24 to 110 VDC for Railway applications
- Value-added modules available for various I/O requirements (COM/LAN/DIO/PoE/CAN/BNC)
- Intelligent solution of power management (ACC ignition)
- 2 swappable 2.5" SATA drives



Specifications

Standard Color	Silver	
Construction	Aluminum extrusion and heavy-duty steel, IP30	
CPU	12th gen Intel® Core™ i7/i5/i3 or Celeron® processor	
Chipset	SoC integrated	
System Memory	2 x DDR5-4800 SO-DIMM, up to 64GB	
BIOS	AMI	
TPM	TPM 2.0	
System I/O Outlets	Serial	1 x DB9 serial console or RS-232/422/485
	Display	2 x Type A HDMI 1.4b (4K)
	Audio	1 x Mic-in, 1 x Line-out
	Ethernet	1 x RJ-45 2.5GbE (Intel® i226-IT)
	USB	4 x USB 3.0
	Others	1 x Reset button 8 x Antenna opening 1 x Power button
Expansion Interface	1 x M.2 M key 2280 NVMe SSD (PCIe x4)	
	1 x M.2 B key for 5G/WiFi 6/BT (PCIe/USB)	
	1 x Full-size Rev.1.2 mPCIe for LTE/WiFi/BT (PCIe/USB)	
	2 x nano SIM slot	
	1 x M.2 A+E key for WiFi 6/BT (PCIe/USB)	
Storage	SATA Drive	2 x Swappable 2.5" SATA drive (9.5 mm height), Intel® RAID 0/1 supported
Watchdog Timer	255 levels, 1 to 255 sec.	

Specifications

Power	Power Supply	Railway: 1 x M12, 24 to 110 VDC
	Power Consumption	TBD
PoE (PSE, Power Sourcing Equipment)	PoE Performance	Up to 8 configurable M12/RJ-45 PoE <ul style="list-style-type: none"> • PoE (802.3af 15.4W/port) • PoE+ (802.3at 30W/port) To be used with VAM PoE * Internal PoE Power
System Indicator	1 x LED indicator for power 1 x LED indicator for SATA drive activity 2 x Programmable	
Operating Temperature	-40°C to +70°C (-40°F to +158°F) with W.T. peripheral*	
Humidity	0% to 95%, non-condensing	
Dimensions	321 mm (12.64") (W) x 210.2 mm (8.28") (D) x 73.3 mm (2.89") (H) (without wall mount)	
Mounting	Wall mount	
Weight	TBD	
Certifications	CE (Class A), LVD, FCC (Class A), EN 50155**, EN 45545-2***	
EMC	CE/FCC	EN 61000-6-4 (Class A), EN 61000-6-2, FCC part 15 B (Class A)
	EN 50155	EN 50121-3-2, IEC 62236-3-2
LVD	EN 60950-1	
Vibration Endurance	3 Grms w/ SSD (5 to 500Hz, X/Y/Z direction; random, operating) 1.5 Grms w/ HDD (5 to 500Hz, X/Y/Z direction; random, operating) 2 Grms w/ HDD & Anti-Vibration Kit (5 to 500Hz, X/Y/Z direction; random, operating) MIL-STD-810G, Method 514.6C-VI Category 4 compliant	
	EN 50155	EN 61373 category 1 class B
Shock	EN 50155	EN(IEC) 61373 category 1 class B, half-sine pulse, 5g, 30ms (longitudinal direction), 3g, 30ms (vertical/transverse direction)
EOS Support	Windows® 10 64-bit, Ubuntu 16.04, Windows® 11 64-bit	
Software Support	AXView	

*Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

** PoE series is compliant with EN 50155








*** EN 45545-2 test report is available exclusively

Ordering Information


System

iBOX520-ADL-MR (P/N: TBD)	Fanless railway embedded system, Intel® Core™ processor, 4 USB 3.0, 2 HDMI, LAN, serial console or RS-232/422/485, Mic-in & Line-out, two 2.5" SATA trays, M12 A-code DC-in, and 24 to 110 VDC
------------------------------	--

Value-Added Modules (VAMs)

VAM100 (P/N: E277100100)	4 x Terminal block 4-wire isolated RS-232/422/485 COM Isolation voltage: 2 kV	
VAM101 (P/N: E277101100)	4 x Terminal block isolated CANbus 2.0A/B Isolation voltage: 2 kV	
VAM200 (P/N: E277200100)	1 x Terminal block isolated DIO 8-in/8-out Isolation voltage: 2 kV	
VAM400 (P/N: E277400100)	4 x BNC video-in & 1 x BNC audio-in • Supports FPS: NTSC/PAL (up to 120fps @960/720 x 480 / 100fps @960/720 x 576), H.264 video recording 2 x Full size Rev. 1.2 PCI Express Mini Card slot • 1 x USB with SIM socket • 1 x USB/PCIe with SIM socket (occupied by 1 x Capture Card)	
VAM600 (P/N: E277600100)	2 x Full size Rev. 1.2 PCI Express Mini Card slot • 1 x USB/PCIe with SIM socket • 1 x USB with SIM socket 4 x Antenna opening	
VAM700/VAM701 (P/N: E277700100/E277701100) VAM702/VAM703 (P/N: E277702100/E277703100) VAM704/VAM705 (P/N: E277704100/E277705100) VAM706/VAM707 (P/N: E277706100/E277707100) VAM708 (P/N: E277708101)	VAM700/701(PoE): 4 x M12 A-code GbE (PoE optional*) VAM702/703(PoE): 4 x RJ-45 GbE (PoE optional*) VAM704/705(PoE): 4 x M12 D-code 10/100 Mbps Ethernet (PoE optional*) VAM706/707(PoE): 4 x M12 X-code GbE (PoE optional*) VAM708 : 4 x M12 A-code w/ LAN Bypass *PSU120-259 is required if select VAM701/703/705/707	
VAM900 (P/N: E277900100)	2 x Full-size Rev.1.2 PCI Express Mini Card slot • 2 x USB with SIM socket 1 x Half-size Rev.1.2 PCI Express Mini Card slot • 1 x PCIe 1 x Terminal block 4-wire isolated RS-232/422/485 COM (isolation Voltage: 2 kV) 1 x Terminal block isolated CANBus 2.0A/B (isolation Voltage: 2 kV) 1 x Terminal block isolated DIO 8-in/8-out (isolation Voltage: 1.5 kV)	

Optional


Anti-vibration Kit (P/N: 8816N5008A0E)	For in-vehicle/rolling stock which improves HDD stability in NVR applications		
AC to DC Adapter	509000001500 50966224010E	PWS FSP120-AAAN3(9NA1206647) FSP 120W FSP090AAAN3	

*Specifications and certifications may vary based on different requirements.

Power Protection

OCP (over current protection)
OVP (over voltage protection)
UVP (under voltage protection)
RPP (reverse polarity protection)

Dimensions

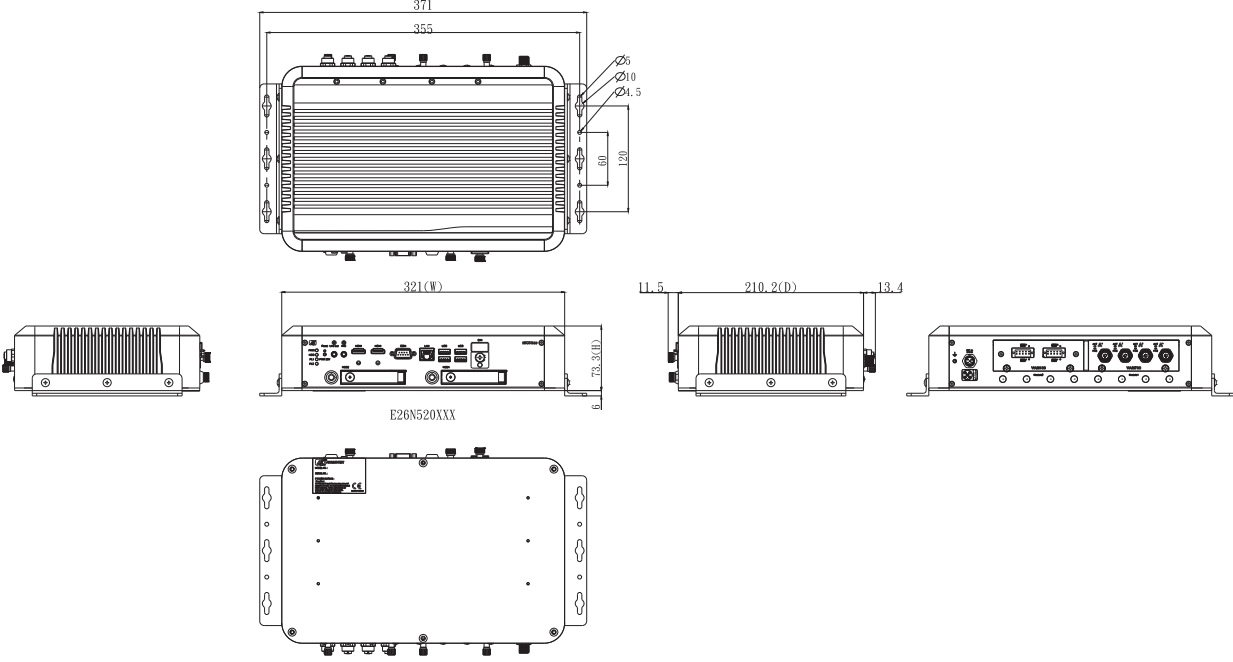

IP SYSTEMES
8 rue du Colonel Chambonnet – BP67
69672 BRON Cedex
Tel. : 04 72 14 18 00
Fax : 04 72 14 18 01
www.ip-systemes.com – info@ip-systemes.fr