



## Main Features

- Metal housing with robust aluminum front zero bezel for harsh environment
- 10 points P-Cap multi-touch with zero bezel flush front design
- Dual GbE/2nd DisplayPort/Dual USB 3.0 & USB 2.0
- 1 x mini-PCIe sockets, 1 x M.2, 1 x RS232/422/485
- DDR3L 8GB/2.5" HDD bracket
- IP66 compliant front panel
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- DC power input 24VDC

## Product Overview

The 18.5" fanless panel PC IPPC 1880P incorporating an industrial motherboard is intended for versatile industrial applications. The panel PC has a touch screen LED backlight LCD panel with 1366 x 768 (HD) resolution. The front panel which adopts flush design and complies with IP66 standard makes it the perfect fit in industrial applications.

The IPPC 1880P supports WLAN expansion and others via dual Gigabit Ethernet connectors, one mini-PCIe slot and one M.2 slot. With support for DC power input of 24VDC, IPPC 1880P can gain a strong foothold in industrial field and machine devices. In addition, IPPC 1880P can hook 2nd display via a DisplayPort for dual independent display. IPPC 1880P has one adjustable RS232/422/485 ports.

## Specifications

### Panel

- LCD size: 18.5", 16:9
- Resolution: HD (WXGA) 1366 x 768
- Luminance: 300cd/m2
- Contrast ratio: 1000
- LCD color: 16.7M
- Viewing angle: 85 (U), 85 (D), 80 (L), 80 (R)
- Backlight: LED

### Touch

- Ten points P-Cap (projected capacitive touch)
- Touch light transmission: 87%
- Anti-scratch surface: 7H hardness
- Touch interface: USB

### System

- Support 6th generation Intel® Core™ i5/i3 BGA type processor
  - Intel® Core™ i5-6300U, 3M Cache, up to 3.0GHz
  - Intel® Core™ i3-6100U, 3M Cache, up to 2.3GHz
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 8GB DDR3L (default), support up to 16GB DDR3L-1866, non-ECC and un-buffered

### Storage device:

- 1 x M.2 2242 B key socket: optional M.2 2242 storage
- 1 x Hard drive bay: optional 1 x 2.5" SATA HDD
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- Expansion: 1 x mini-PCIe sockets (support optional Wi-Fi module)
- Front LED indicator to show operating status


### Rear I/O

- Ethernet: 2 x RJ45
- 2nd DisplayPort: 2 x DP1.2
- USB: 2 x USB 2.0, 2 x USB 3.0
- LED indicator: power/HDD/GPIO programmable LED
- Power button
- COM #3: RS232/422/485
- COM #1&2: RS232
- 1 x 3-pin 24V DC input
- GPIO

### Ethernet

- LAN chip: dual Intel® I210-AT Gigabit LAN
- Ethernet interface: 10/100/1000 based-Tx Ethernet compatible

## Dimension Drawing

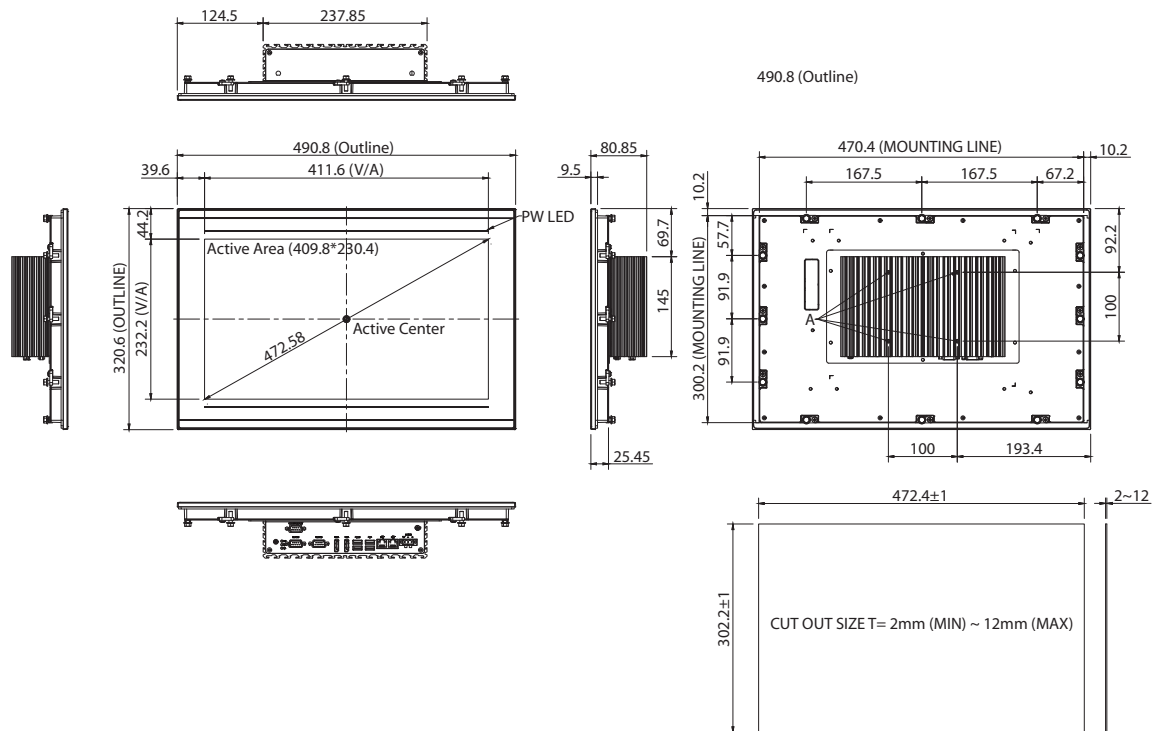

### Mechanical & Environment

- Color: black silver front bezel
- IP protection: IP66 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- System with panel mounting kit w/o panel mounting hole
- Power:
  - Power input: 24 VDC
  - Power adapter: optional AC to DC power adapter (+24V, 60W)
- Vibration:
  - IEC 68 2-64 (w/ HDD)
  - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
  - 2Grms @ sine, 5~500Hz, 1hr/axis (SSD operating)
  - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
  - IEC 68 2-27
  - HDD: 20G@wall mount, half sine, 11ms
- Temperature:
  - Operating temperature: 0°C to 50°C
  - Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 490.8 x 320.6 x 80.85 mm
- Weight: 6.64 kg

### Certifications

- CE (including EN61000-6-2/EN61000-6-4)
- FCC class A

### OS Support Lists

- Windows 10 IoT 64-bit
- Windows 7 Pro 64-bit
- Wes7P 64-bit

## Ordering Information

### Barebone

- **IPPC 1880P-6100U (P/N: 10I11880P00X0)**  
18.5" HD LED Backlight Touch Panel PC, 6th generation Intel® Core™ i3-6100U processor, 2.30GHz, P-Cap touch screen, 8GB DDR3L
- **IPPC 1880P-6300U (P/N: 10I11880P01X0)**  
18.5" HD LED Backlight Touch Panel PC, 6th generation Intel® Core™ i5-6300U processor, 2.40GHz, P-Cap touch screen, 8GB DDR3L

### Options

- **24V, 120W AC/DC power adapter w/o power cord (P/N: 7400120023X00)**



**IP SYSTEMES**

8 rue du Colonel Chambonnet – BP67

69672 BRON Cedex

Tel. : 04 72 14 18 00

Fax : 04 72 14 18 01

[www.ip-systemes.com](http://www.ip-systemes.com) – [info@ip-systemes.fr](mailto:info@ip-systemes.fr)