


tBOX300-510-FL

Fanless Embedded System with 7th Gen Intel® Core™ i7/i5/i3 & Celeron® Processor for Railway and Marine PC

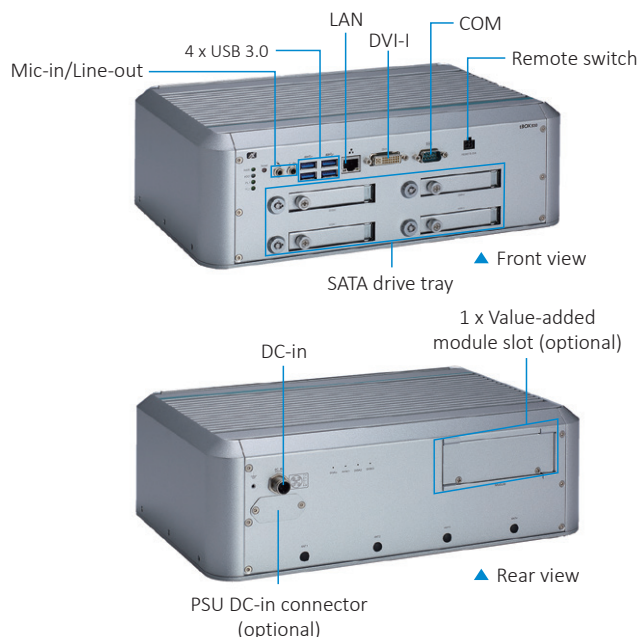

Features

- CE, LVD, FCC and EN 50155 certified; EN 45545-2 compliant
- 7th gen Intel® Core™ i7/i5/i3 & Celeron® processors (Kaby Lake)
- Fanless and wide operating temperatures from -25°C to +70°C
- Power Input:
 - 24 to 110 VDC for railway version
 - 24 VDC for marine version
- External PoE PSU (optional), up to 60W power supply
- Value-added modules available for various I/O requirements (COM/LAN/DIO/PoE/CAN/BNC)
- 4 swappable 2.5" SATA drives, Supports Marvell Hardware RAID 0/1/10



Specifications

Standard Color	Silver
Construction	Aluminum extrusion and heavy-duty steel, IP30
CPU	Intel® Core™ i7-7600U 2C @2.8 GHz TDP: 15W Intel® Core™ i5-7300U 2C @2.6 GHz TDP: 15W Intel® Core™ i3-7100U 2C @2.4 GHz TDP: 15W Intel® Celeron® 3965U 2C @2.2 GHz TDP: 15W
Chipset	SoC integrated
System Memory	2 x DDR4-1866/2133 SO-DIMM, up to 32GB
BIOS	AMI
TPM	TPM 2.0
System I/O Outlet	Serial: 1 x DB9 serial console or RS-232/422/485 Display: 1 x DVI-I (up to 1920 x1200 @60Hz) 1 x VGA and 1 x DVI included) Audio: 1 x Mic-in, 1 x Line-out Ethernet: 1 x RJ-45 10/100/1000 Mbps Ethernet (Intel® i210-IT) USB: 4 x USB 3.0 Others: 1 x Reset button 1 x Remote switch 4 x Antenna opening
Expansion Interface	3 x Full-size Rev.1.2 PCI Express Mini Card slot: • 1 x mSATA/PCIe • 2 x USB/PCIe with SIM socket 1 x Value-added module slot
Storage	SATA Drive: 4 x Swappable 2.5" SATA drive (9.5 mm height), Marvell HW RAID 0/1/10 supported mSATA: 1 x mSATA (occupied 1 x PCI Express Mini Card slot)
Watchdog Timer	255 levels, 1 to 255 sec.
Power	Power Supply: Railway: 1 x M12, 24 to 110 VDC Marine: 1 x terminal block, 24 VDC Power Consumption: 24V- 110V, 3.5A- 0.7A



8 rue du Colonel Chambonnet
 69500 BRON - FRANCE
 04 72 14 18 00
 info@ip-systemes.fr
 www.ip-systemes.com



Specifications

PoE (PSE, Power Sourcing Equipment)	PoE Power Source	1 x Terminal block PoE power-in with PSU120-259 (optional, see Ordering info)
	PoE Performance	Up to 4 x configurable M12/RJ-45 PoE output max. 60W supports PoE & PoE+ <ul style="list-style-type: none"> PoE (802.3af 15.4W/port) PoE+ (802.3at 30W/port) To be used with VAM PoE series and PSU120-259 series (optional, see Ordering info)
System Indicator	1 x LED indicator for mSATA activity 1 x LED indicator for power 4 x LED indicator for SATA drive activity 2 x programmable	
Operating Temperature	-25°C to +70°C (-13°F to +158°F) with W.T. peripheral* -25°C to +60°C (-13°F to +140°F) with external PoE PSU & W.T. peripheral	
Humidity	0% to 95%, non-condensing	
Dimensions	321 mm (12.64") (W) x 210.2 mm (8.28") (D) x 105.33 mm (4.15") (H) (without wall mount)	
Mounting	Wall mount	
Weight (net/gross)	5.5 kg (12.13 lb)/6.7 kg (14.77 lb)	
Certifications	CE (Class A), LVD, FCC (Class A) and EN 50155 certified; EN 45545-2 compliant	
EMC	CE/FCC	EN 61000-6-4 (Class A), EN 61000-6-2, FCC Part 15 B (Class A)
	EN 50155	EN 50121-3-2, IEC 62236-3-2
LVD	EN 60950-1	
Vibration Endurance	3 Grms w/ SSD (5 to 500Hz, X/Y/Z direction; random, operating) 1 Grms w/ HDD (5 to 500Hz, X/Y/Z direction; random, operating) 2 Grms w/ HDD & Anti-Vibration Kit (5 to 500Hz, X/Y/Z direction; random, operating) MIL-STD-810G, Method 514.6C-VI Category 4 compliant	
	EN 50155	EN (IEC) 61373 category 1 class B
Shock	EN 50155	EN (IEC) 61373 category 1 class B, half-sine pulse, 5g, 30ms (longitudinal direction), 3g, 30ms (vertical/transverse direction)
EOS Support	Windows® 10 64-bit, Ubuntu 18.04	
Software Support	AXView	

*Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Ordering Information










System

tBOX300-510-FL-Celeron®/i3/i5/i7-24-110MRDC (P/N: E26N300100) for i7-7600U (P/N: E26N300101) for i5-7300U (P/N: E26N300102) for i3-7100U (P/N: E26N300103) for 3965U	Fanless railway embedded system, Intel® Celeron® 3965U/Core™ i3-7100U/i5-7300U/ i7-7600U processor, 4 USB 3.0, DVI-I, LAN, serial console or RS-232/422/485, Mic-in & Line-out, four 2.5" SATA trays, M12 DC-in, and 24 to 110 VDC	
tBOX300-510-FL-Celeron®/i3/i5/i7-TMDC (By request)	Fanless marine embedded system, Intel® Celeron® 3965U/Core™ i3-7100U/i5-7300U/ i7-7600U processor, 4 USB 3.0, DVI-I, LAN, serial console or RS-232/422/485, Mic-in & Line-out, four 2.5" SATA trays, terminal block DC-in, and 14 to 32 VDC	


*MRDC: M12 DC-in connector, railway SKU, DC voltage input

*TMDC: Terminal block DC-in connector, marine SKU, DC voltage input

Value-Added Modules (VAMs) & PSU120-259

VAM100 (P/N: E277100100)	4 x Terminal block 4-wire isolated RS-232/422/485 COM Isolation voltage: 2 kV	
VAM101 (P/N: E277101100)	4 x Terminal block isolated CANBus 2.0A/B Isolation voltage: 2 kV	
VAM200 (P/N: E277200100)	1 x Terminal block isolated DIO 8-in/8-out Isolation voltage: 2 kV	
VAM400 (P/N: E277400100)	4 x BNC video-in & 1 x BNC audio-in • Supports FPS: NTSC/PAL (up to 120fps @960/720 x 480/100fps @960/720 x 576), H.264 video recording 2 x Full size Rev. 1.2 PCI Express Mini Card slot • 1 x USB with SIM socket • 1 x USB/PCIe with SIM socket (occupied by 1 x Capture Card)	
VAM600 (P/N: E277600100)	2 x Full size Rev. 1.2 PCI Express Mini card slot • 1 x USB/PCIe with SIM socket • 1 x USB with SIM socket 4 x Antenna opening	
VAM700/VAM701 (P/N: E277700100/E277701100) VAM702/VAM703 (P/N: E277702100/E277703100) VAM704/VAM705 (P/N: E277704100/E277705100) VAM706/VAM707 (P/N: E277706100/E277707100) VAM708 (P/N: E277708101)	VAM700/701 (PoE): 4 x M12 A-code GbE (PoE optional*) VAM702/703 (PoE): 4 x RJ45 GbE (PoE optional*) VAM704/705 (PoE): 4 x M12 D-code 10/100 Mbps Ethernet (PoE optional*) VAM706/707 (PoE): 4 x M12 X-code GbE (PoE optional*) VAM708 : 4 x M12 A-code w/ LAN Bypass *PSU120-259 is required if select VAM701/703/705/707	 
VAM900 (P/N: E277900100)	2 x Full-size Rev.1.2 PCI Express Mini Card slot • 2 x USB with SIM socket 1 x Half-size Rev.1.2 PCI Express Mini Card slot • 1 x PCIe 1 x Terminal block 4-wire isolated RS-232/422/485 COM (isolation Voltage: 2 kV) 1 x Terminal block isolated CANBus 2.0A/B (isolation Voltage: 2 kV) 1 x Terminal block isolated DIO 8-in/8-out (isolation Voltage: 1.5 kV)	
PSU120-259 series Railway-24VDC (P/N: E276120101) Railway-48VDC (P/N: E276120102) Railway-96/110VDC (P/N: E276120103)	Fanless DC-DC adapter • Support 24/48/96/110V-in • Power output max. 120W • -40°C to +70°C (-40°F to +158°F)	

Optional

Anti-vibration Kit (P/N: 8816N5008A0E)	For in-vehicle/rolling stock which improves HDD stability in NVR applications	
Communication Modules	8816N3239A0E 3G UC20GKit for tBOX/UST (3G ANT) (E) 8816N3235A0E 3G/GPS UC20GKit tBOX/UST (3G/GPS ANT) (E) 886N50010A0E LTE LE910C4-AP KIT (30) for tBOX (E) 886N50011A0E LTE LE910C4-EU KIT (30) for tBOX (E) 886N50012A0E LTE LE910C4-NF KIT (30) for tBOX (E)	
AC to DC Adapter	50966224010E Aadpter 24V 90W, M12 A-code 5P FSP090AAAN3	

*Specifications and certifications may vary based on different requirements.

Power Protection


OCP (over current protection)

OVP (over voltage protection)

UVP (under voltage protection)

RPP (reverse polarity protection)

Dimensions

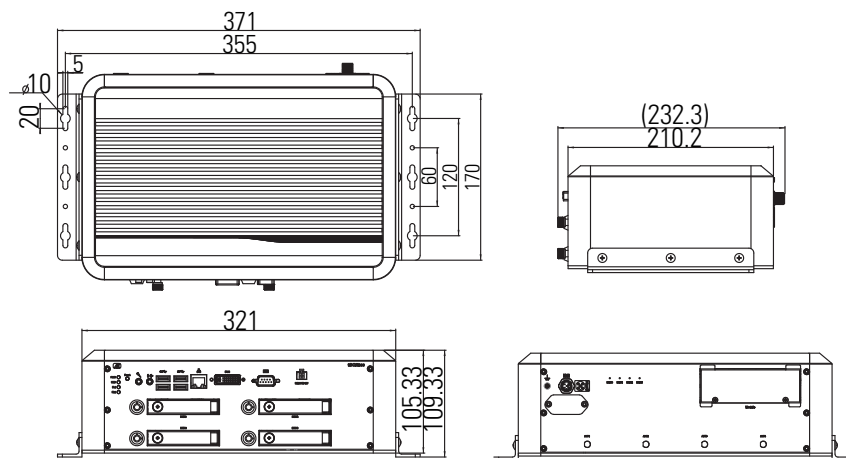

8 rue du Colonel Chambonnet
69500 BRON - FRANCE
04 72 14 18 00
info@ip-systemes.fr
www.ip-systemes.com